


INSTALLATION INSTRUCTIONS FOR BC-CD CORD TYPE BALLAST CANOPY FLUORESCENT

- 1) TURN OFF POWER.
- 2) ATTACH MOUNTING BRACKET TO OUTLET BOX WITH SCREWS PROVIDED.
- 3) REFLECTOR IS PREWIRED WITH 10' CORD. SLIP WIRES FROM REFLECTOR THROUGH CANOPY.
- 4) ATTACH GROUND WIRE TO GREEN GROUND SCREW AND CUP WASHER ON BOTTOM INSIDE OF STRAP.

NEVER CONNECT GROUND WIRE TO BLACK LINE OR WHITE NEUTRAL POWER SUPPLY WIRES.
- 5) MAKE WIRE CONNECTIONS (CONNECTORS NOT PROVIDED.) REFERENCE WIRING DIAGRAM BELOW AND WIRE ACCORDING TO LOCAL AND NATIONAL ELECTRIC CODES.
- 6) TIGHTEN STRAIN RELIEF.
- 7) PUSH CANOPY TO CEILING SECURE WITH SLIP RING.

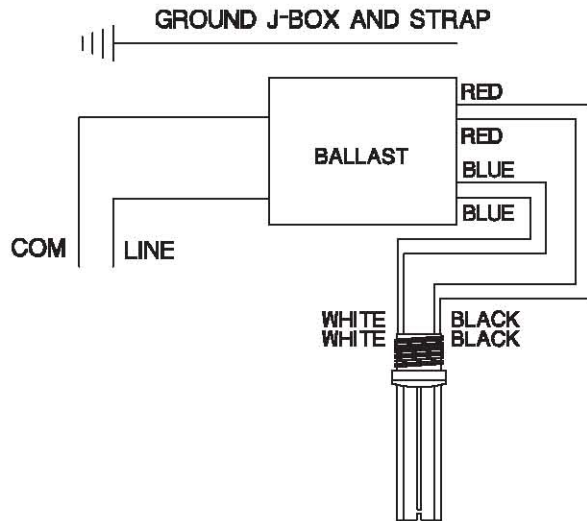

THESE PARTS ARE
FACTORY ASSEMBLED

ELECTRONIC BALLAST No.
B 26/32/42 ELC UNV

1/2" COUPLING
No. Z-F CPL 2

CORD 18/5 SJT 105 DEC. C
WHITE OR BLACK 10' O.A.L.

CAST ZINC NUT
No. Z-C-91

FIBER GASKETS
No. Z-G-10


TYPICAL RLM
REFLECTOR

CAST ZINC MOUNTING
FLANGE 1/2" THREADS
No. Z-C-93

(2) 8-32 TINNEMAN CLIPS
No. Z-F-CLP-7

8-32 HEX HEAD SCREW
LENGTH VARIES WITH
REFLECTOR STYLE

GLOBE CHOICE: No. 41, 41PR, 41C,
41L-PR, 42, 42PR, 42C OR GG-6
(42 Series required for 42W CFL)



GREEN GROUND SCREW
No. Z-F GRND SCR 1
WITH BRASS CUP WASHER No.
Z-F WCUP 1

CONDUIT FLANGED NIPPLE
No. Z-E 61

(2) BRACKET MOUNTING SCREWS
8-32 X 1 1/4" PHILIPS PAN
HEAD No. Z-F SCR 213

BALLAST BRACKET No. Z-ST-799
SUPPORTS COUPLING / CORD
ASSEMBLY MOUNTS TO CEILING
OUTLET BOX

POWDER COATED CANOPY
No. Z-H-319 FOR 3/4" STEMS

ALUMINUM SLIP RING
No. Z-F CHOKE-3/4"
WITH 8-32 SET SCREW
No. Z-F SCR 123
FITS OVER COUPLING
TO SUPPORT CANOPY

1/2 - 14 N.P.T. THERMOPLASTIC
STRAIN RELIEF - BLACK
No. Z-F SR3

FITTER MOUNTING
BRACKET No. Z-ST-744

SOCKET MOUNTING PLATE
No. Z-ST-741 SMALL
No. Z-ST-742 MEDIUM OR
No. Z-ST-743 LARGE

THERMOPLASTIC 4-PIN SOCKET
TYPE GX24Q-3 (26W - 32W No. Z-SK-45)
TYPE GX24Q-4 (42W) No. Z-SK-42

FITTER FOR THREADED GLOBES
No. Z-H-241 (41 Series & GG-6)
No. Z-H-242 (42 Series)