

# RLM SERIES


Exclusive Catalog

# Bock Lighting





|    |                                     |
|----|-------------------------------------|
| 3  | About Bock                          |
| 4  | RLM Heritage                        |
| 6  | RLM fixture                         |
| 7  | Product Builder                     |
| 9  | Standard Reflectors                 |
| 16 | Sign Lighters                       |
| 18 | Dècor                               |
| 29 | Galvanized RLM Reflectors           |
| 31 | Metro Series                        |
| 35 | Powder Coat Colors                  |
| 36 | Lamp Type                           |
| 40 | Drive/Ballast Enclosure             |
| 41 | Globe & Guard Options               |
| 43 | Mounting - Stem/Pendant/Canopy/Cord |
| 46 | Cloth Cords Colors                  |
| 47 | Mounting - Brackets & Gooseneck     |
| 52 | Photometric & Application Data      |
| 54 | Bock's Projects                     |

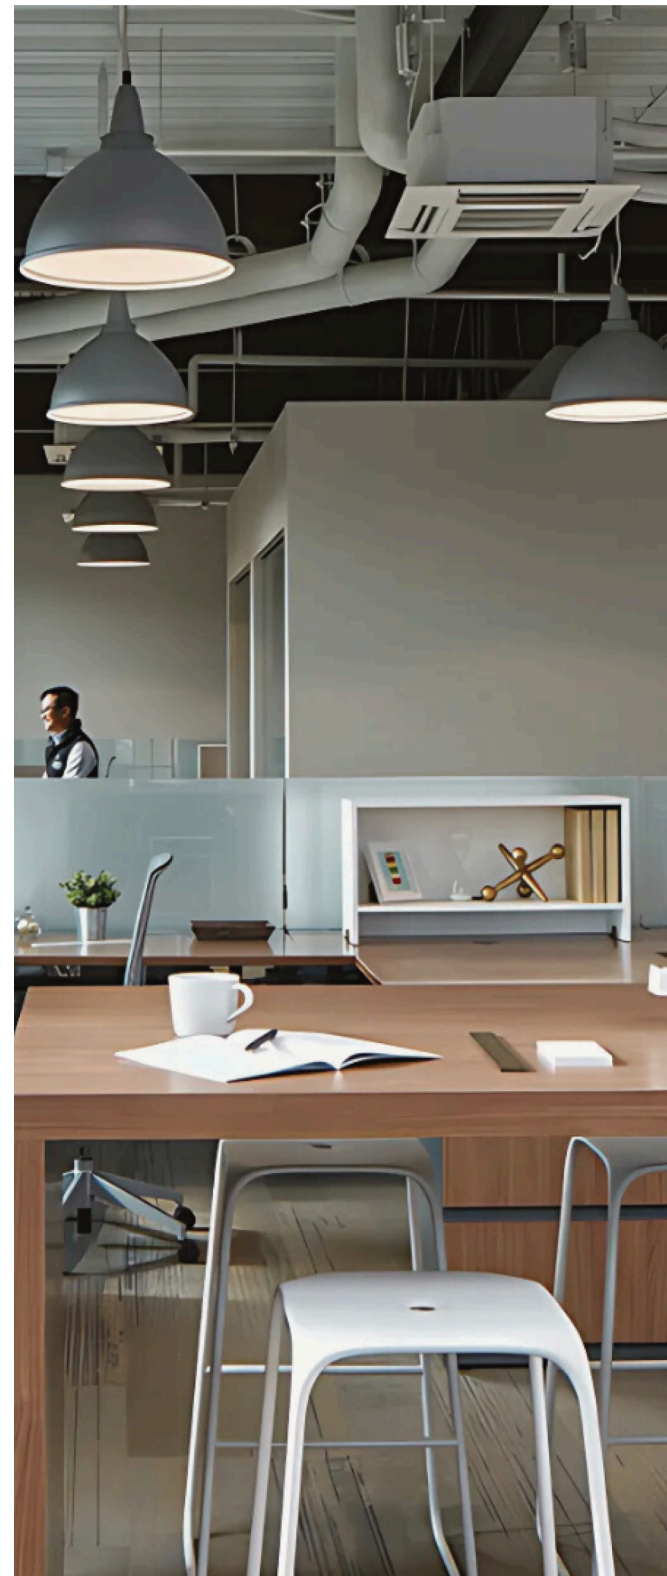

In 1918, my great grandfather Ben and his brothers started Spero Lighting/Spero Electric with a commitment to high-quality electrical and lighting products, innovation, and unparalleled customer service. For the next 3 generations, the torch passed down the family line, from my grandfather, Manny, to my father, Mitchell, to me, as our dedication to quality, service, and innovation persisted. In 2009, Bock Lighting acquired Spero Lighting and together we have continued to offer and advance the high-quality lighting products that my family created.

We have also successfully grown into other lighting product categories. We now design and manufacture lighting for a number of different applications.

Ezra Spero,  
President

## WHAT MAKES BOCK LIGHTING UNIQUE?

Bock Lighting delivers high-quality lighting fixtures, exceptional service, continuous innovation, great value, and the ability to fully customize a lighting solution.

## EXCEPTIONAL CUSTOMER SERVICE

Customers of Bock Lighting rave about the company's straightforward sales approach, scheduling flexibility and incredibly short lead times (standard products can be delivered in less than two weeks.) The entire Bock Lighting team is devoted to providing a satisfying experience and will go to great lengths to exceed our customers expectations.

## CONTINUOUS INNOVATION

Bock Lighting continues to innovate and improve its products to incorporate industry advancements in materials and technology, without compromising the aesthetics and integrity of the fixtures. Fixtures are compatible with a number of lamp types including LED light sources that offer increased fixture efficiency, long product life, and smooth and even light distribution.

## IMPRESSIVE CUSTOM LIGHTING SOLUTIONS

Designers often turn to Bock Lighting to create fully custom lighting solutions for their projects. From a special color to a unique mounting type or tailored reflector design, every aspect of the lighting fixture can be modified. The incredible flexibility in customization is made possible by the talent and dedication of the Bock team and the company's local manufacturing facility. All Bock Lighting fixtures are manufactured and assembled in Cleveland, Ohio.





# The Heritage of the Bock RLM Series

The Bock RLM series is iconic in both style and functionality. First developed in the early 1900's to replace the individual overhead lights traditionally used in warehouses and factories, the RLM light fixture, most often characterized by its spun metal reflector and white interior, offered a more efficient lighting solution that provided a broader distribution of light. In 1919, a standard was developed to specify minimum requirements in efficiency, safety, and quality for these types of fixtures. It was called the RLM Standard Specifications for Industrial Lighting Units. The Spero RLM fixture was one of the fixtures to earn the approval of this original lighting standard.



Since then, a number of changes have been made to the Spero RLM series. New metals, materials, painting techniques, and lighting technologies have improved the overall performance and durability of the fixture, without compromising the iconic spun-metal design. Bock Lighting has also expanded the RLM series to include more shapes, colors, lamp types, and mounting options.



With continued innovation, the iconic Bock RLM series now offers:

- Reflectors made of precision spun aluminum or steel.
- A high-quality, thermally-cured polyester powder coat paint for unparalleled durability.
- Higher reflectance values which improve the overall efficiency of the fixture.
- Turned-in bottom beads add strength and prevent the collection of dirt and water on the fixture.
- Compatibility with several light sources including the latest in LED technology.

# RLM

**Standard Specifications**

for industrial lighting equipment






# How to Specify an RLM Fixture

- 1 SELECT REFLECTOR DESIGN**
  - a. All Reflectors come standard with Medium Base (#5) socket with 96" leads 3/4" hub.
- 2 SELECT COLOR FINISH INTERIOR + EXTERIOR**
  - a. Fixtures come standard with Powder Coat Finish
  - b. Bock offers over 30 color finishes in High Quality Polyester Powder Coating for indoor/outdoor use.
- 3 SELECT LIGHT SOURCE**
  - a. Select Light Source, if Medium Base (#5) Incandescent not applicable to your application.
  - b. Other light sources include Speciality and LED modules.
  - c. LVXV1- LED choose Lumens and Kelvins.
- 4 SELECT ACCESSORIES**
  - a. Accessory Options - some accessories may not be compatible with certain builds
    - i. Lens
    - ii. Cast Guards
    - iii. Wire Guards
  - b. Color choice required
- 5 SELECT BALLAST ENCLOSURE**
  - a. Driver/Ballast Enclosure may be required depending on light source and reflector.
- 6 SELECT MOUNTING**
  - a. Select Mounting option. (Goosenecks, Cord, Stem and other options.)
  - b. Color choice required


516-G0  
Reflector Series & Color  
516 in Black




MED5  
Light Source  
Medium Base



116AR-G0  
Accessory - Guard  
16" Wire Guard in Black



GN23A-G0  
Mounting & Color  
Gooseneck in Black



## CROSS REFERENCING

Have a different product code, or need an alternative, call or eMail Bock, for assistance.


216-912-7050

FAX to 216-912-7051

SALES@BOCKLIGHTING.COM

# RLM Product Builder

Use the Product Builder to generate a PDF to share with your design team. Only valid product configurations will be created by the Product Builder, eliminating the guess work and potential errors from the specification process.

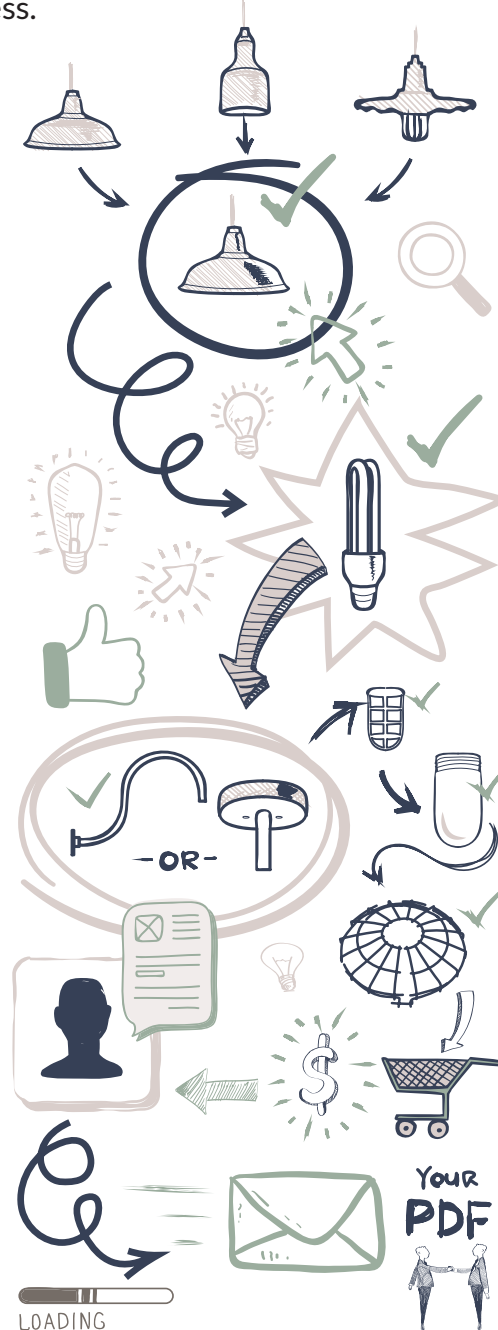

## HOW TO

Begin on [www.BockLighting.com/create](http://www.BockLighting.com/create)

Step 1 • Select Reflector Style

Step 2 • Select Color Finish Interior + Exterior

Step 3 • Select Select Lamp Type  
(Including the latest in LED technology)

Step 4 • Select Accessories  
(Wireguard, Jelly Jar, Lens, etc.)

Step 5 • Select Ballast Enclosure (If applicable)

Step 6 • Select Mounting Type

Step 7 • Personalize  
(Add project details to your spec sheet)

Step 8 • Save this Build  
(You now have a custom PDF spec sheet)

Download PDF and Send

Watch a short tutorial at [www.bocklighting.com/support/website](http://www.bocklighting.com/support/website)  
Visit the Product Builder to build your own spec.





Fixture—Standard Dome

# Standard Reflectors

The Bock RLM Series combines iconic style and high-quality design to offer an excellent lighting solution for both indoor and outdoor applications. Reflectors are precision-spun from a high quality aluminum or steel. There are more than 30 shapes available in different sizes each. All reflectors compatible with a number of different light sources, mounting options, and accessories. All RLMs are Underwriter’s Laboratories Inc. ® Listed, cULus listed for use in the United States and Canada.



### Standard Dome

| Cat.# | Max Watt | Dia | Ht    |
|-------|----------|-----|-------|
| 512   | 100W     | 12" | 8 ¼"  |
| 514   | 150W     | 14" | 8 ¾"  |
| 516   | 200W     | 16" | 9 ¾"  |
| 518   | 300W     | 18" | 11 ⅝" |
| 520   | 300W     | 20" | 12 ⅝" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



### Step Neck Dome

| Cat.# | Max Watt | Dia | Ht    |
|-------|----------|-----|-------|
| SN512 | 100W     | 12" | 9"    |
| SN514 | 150W     | 14" | 9"    |
| SN516 | 200W     | 16" | 10 ½" |
| SN518 | 300W     | 18" | 11 ⅞" |
| SN520 | 300W     | 20" | 13 ⅜" |
| SN524 | 300W     | 24" | 14 ½" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



### Shallow Dome

| Cat.# | Max Watt | Dia | Ht   |
|-------|----------|-----|------|
| 412   | 100W     | 12" | 6 ⅝" |
| 414   | 150W     | 14" | 7 ⅞" |
| 416   | 200W     | 16" | 8 ½" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



# Standard Reflectors



## Deep Bowl

| Cat.# | Max Watt | Dia | Ht  |
|-------|----------|-----|-----|
| SN908 | 100W     | 8"  | 7"  |
| SN910 | 200W     | 10" | 9"  |
| SN912 | 300W     | 12" | 11" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



## Downlight Reflector

| Cat.# | Max Watt | Dia | Ht    |
|-------|----------|-----|-------|
| 914DL | 300W     | 14" | 13 ½" |
| 916DL | 300W     | 16" | 15 ¼" |
| 918DL | 300W     | 18" | 17 ¾" |
| 924DL | 300W     | 24" | 18 ½" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



## Outlet Box Mounted

| Cat.#  | Max Watt | Dia | Ht   |
|--------|----------|-----|------|
| 312-OB | 100W     | 12" | 6"   |
| 314-OB | 150W     | 14" | 6 ½" |
| 316-OB | 200W     | 16" | 7"   |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)

Mount to 4" octagon box with 3.5in spacing.



## Radial Wave

| Cat.# | Max Watt | Dia | Ht   |
|-------|----------|-----|------|
| RW16  | 100W     | 16" | 6 ¾" |
| RW20  | 200W     | 20" | 7"   |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



## Self Ballasted Deep Bowl

| Cat.# | Max Watt | Dia | Ht  |
|-------|----------|-----|-----|
| 914B  | 175W     | 14" | 16" |
| 916B  | 175W     | 16" | 17" |
| 918B  | 175W     | 18" | 19" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)

Driver/Ballast built into reflector.



## Self Ballasted Cone

| Cat.# | Max Watt | Dia | Ht    |
|-------|----------|-----|-------|
| 110B* | 100W     | 10" | 9 ¼"  |
| 116B  | 175W     | 16" | 13"   |
| 120B  | 175W     | 20" | 14 ¾" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)

Driver/Ballast built into reflector.

\*110B-External Driver/Ballast enclosure may be required



## Self Ballasted Dome

| Cat.# | Max Watt | Dia | Ht  |
|-------|----------|-----|-----|
| 516B  | 175W     | 16" | 13" |
| 520B  | 175W     | 20" | 14" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)

Driver/Ballast built into reflector.



## SRDB

| Cat.#  | Max Watt | Dia | Ht  |
|--------|----------|-----|-----|
| SRDB14 | 100W     | 14" | 12" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



# Standard Reflectors



## SB-AG

| Cat.#   | Max Watt | Dia | Ht  |
|---------|----------|-----|-----|
| SB-AG12 | 100W     | 12" | 10" |
| SB-AG14 | 100W     | 14" | 11" |
| SB-AG16 | 100W     | 16" | 12" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



## SB-DL

| Cat.#    | Max Watt | Dia | Ht      |
|----------|----------|-----|---------|
| SB-916DL | 200W     | 16" | 13 7/8" |
| SB-918DL | 200W     | 18" | 15"     |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



## SB-RW

| Cat.#   | Max Watt | Dia | Ht     |
|---------|----------|-----|--------|
| SB-RW16 | 100W     | 16" | 6"     |
| SB-RW20 | 150W     | 20" | 6 1/8" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



## SB-5

| Cat.#  | Max Watt | Dia | Ht      |
|--------|----------|-----|---------|
| SB-512 | 100W     | 12" | 8 1/4"  |
| SB-514 | 150W     | 14" | 8 1/4"  |
| SB-516 | 200W     | 16" | 10 3/4" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



## SB-VRA

| Cat.#    | Max Watt | Dia | Ht     |
|----------|----------|-----|--------|
| SB-VRA12 | 200W     | 12" | 6 1/2" |
| SB-VRA14 | 200W     | 14" | 7"     |
| SB-VRA16 | 200W     | 16" | 8 1/2" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



## SB-VRB

| Cat.#    | Max Watt | Dia | Ht     |
|----------|----------|-----|--------|
| SB-VRB12 | 200W     | 12" | 6 1/2" |
| SB-VRB14 | 200W     | 14" | 7 1/4" |
| SB-VRB16 | 200W     | 16" | 7 3/4" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



## SB-VRC

| Cat.#    | Max Watt | Dia | Ht     |
|----------|----------|-----|--------|
| SB-VRC12 | 200W     | 12" | 7 1/2" |
| SB-VRC14 | 200W     | 14" | 7 1/4" |
| SB-VRC16 | 200W     | 16" | 8 1/2" |
| SB-VRC18 | 200W     | 18" | 9 1/4" |
| SB-VRC20 | 200W     | 20" | 9 3/4" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



## SB-VRD

| Cat.#    | Max Watt | Dia | Ht     |
|----------|----------|-----|--------|
| SB-VRD12 | 200W     | 12" | 7 1/2" |
| SB-VRD14 | 200W     | 14" | 7 1/4" |
| SB-VRD16 | 200W     | 16" | 8 1/2" |
| SB-VRD18 | 200W     | 18" | 9 1/4" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



# Standard Reflectors



901 Island Light

| Cat.# | Max Watt | Dia | Ht  |
|-------|----------|-----|-----|
| 901   | 100W     | 20" | 18" |

Lamp Types: INC, LED (LVE, LVF, LVX)



902 Island Light

| Cat.# | Max Watt | Dia | Ht  |
|-------|----------|-----|-----|
| 902   | 100W     | 27" | 17" |

Lamp Types: INC, LED (LVE, LVF, LVX)



18" Uplight

| Cat.# | Max Watt | Dia | Ht   |
|-------|----------|-----|------|
| 918UL | 300W     | 18" | 17½" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)





# Sign Lighters

Bock RLM angled reflectors are great for sign and entrance way applications, when used with a gooseneck.

We offer a wide variety of goosenecks and custom capabilities that help with meeting your requirements. Bock can provide photometric files and layout services to help aid in your design.



| Reflector   | Gooseneck | "A"   |
|-------------|-----------|-------|
| SN608/ 6208 | GN23A     | 34 ¼" |
| SN610/ 6210 | GN23A     | 35 ¾" |
| SN612/ 6212 | GN23A     | 37 ¼" |

**\*Quick Design Tip:** When using Bock's GN23A gooseneck to position the RLM angled reflector, mount the gooseneck 34-37 inches above the center of the sign. Spacing between fixtures should not exceed four feet.



## Emblem Sign

| Cat.# | Max Watt | Dia | Ht    |
|-------|----------|-----|-------|
| 6208  | 100W     | 8"  | 10 ⅛" |
| 6210  | 150W     | 10" | 11 ¾" |
| 6212  | 200W     | 12" | 13 ¾" |
| 6214  | 300W     | 14" | 15 ¾" |
| 6218  | 300W     | 18" | 21 ½" |
| 6222  | 300W     | 22" | 23 ½" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC)



## Step Neck Angle

| Cat.# | Max Watt | Dia | Ht    |
|-------|----------|-----|-------|
| SN608 | 100W     | 8"  | 9 ½"  |
| SN610 | 150W     | 10" | 12"   |
| SN612 | 200W     | 12" | 14 ¼" |
| SN614 | 300W     | 14" | 15 ¼" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC)







AG

| Cat.# | Max Watt | Dia | Ht  |
|-------|----------|-----|-----|
| AG12  | 100W     | 12" | 6½" |
| AG14  | 150W     | 14" | 6¾" |
| AG16  | 200W     | 16" | 7½" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



AH

| Cat.# | Max Watt | Dia | Ht    |
|-------|----------|-----|-------|
| AH08  | 100W     | 8"  | 9 ½"  |
| AH10  | 100W     | 10" | 11 ½" |
| AH12  | 100W     | 12" | 13 ¾" |
| AH14  | 150W     | 14" | 15 ¾" |
| AH16  | 150W     | 16" | 18"   |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)  
\*AH can be customized with a wood top.



AK

| Cat.#  | Max Watt | Dia | Ht |
|--------|----------|-----|----|
| AK10   | 100W     | 10" | 9" |
| AK10VN | 100W     | 10" | 9" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)  
AK Comes in both non-vented and vented style.



AL

| Cat.# | Max Watt | Dia | Ht    |
|-------|----------|-----|-------|
| AL12  | 100W     | 12" | 7 ½"  |
| AL14  | 100W     | 14" | 10"   |
| AL16  | 150W     | 16" | 14 ¼" |
| AL16  | 200W     | 8"  | 18"   |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



AS

| Cat.# | Max Watt | Dia | Ht    |
|-------|----------|-----|-------|
| AS08  | 60W      | 8"  | 7 ½"  |
| AS10  | 60W      | 10" | 10"   |
| AS12  | 60W      | 12" | 14 ¼" |
| AS14  | 60W      | 14" | 18"   |
| AS16  | 100W     | 6"  | 18"   |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



AT

| Cat.# | Max Watt | Dia | Ht   |
|-------|----------|-----|------|
| AT08  | 60W      | 8"  | 2 ⅞" |
| AT12  | 60W      | 12" | 4"   |
| AT16  | 60W      | 16" | 5 ⅜" |
| AT20  | 60W      | 20" | 6 ¾" |
| AT24  | 60W      | 24" | 8 ⅝" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



AX

| Cat.#    | Max Watt | Dia | Ht  |
|----------|----------|-----|-----|
| AX-12-24 | 60W      | 12" | 24" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC)



AY

| Cat.# | Max Watt | Dia | Ht |
|-------|----------|-----|----|
| AY08  | 60W      | 8"  | 8" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)





| Cat.#   | Max Watt | Dia | Ht  |
|---------|----------|-----|-----|
| BERET15 | 100W     | 15" | 7½" |
| BERET20 | 100W     | 20" | 10" |
| BERET24 | 100W     | 24" | 12" |
| BERET30 | 100W     | 30" | 15" |
| BERET36 | 100W     | 36" | 18" |
| BERET48 | 100W     | 48" | 24" |
| BERET60 | 100W     | 60" | 30" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



| Cat.# | Max Watt | Dia | Ht   |
|-------|----------|-----|------|
| BH    | 100W     | 12" | 10¾" |
| BHVN  | 100W     | 12" | 10¾" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC)  
\*BH Comes in both non-vented and vented style.




| Cat.# | Max Watt | Dia  | Ht   |
|-------|----------|------|------|
| BUC6  | 100W     | 6 ½" | 8 ¼" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC)  
Glass version available in our Decorative Commercial offering (see website).



| Cat.#    | Max Watt | Dia | Ht  |
|----------|----------|-----|-----|
| BULLET-5 | 100W     | 5"  | 10" |

Lamp Types: INC, LED (LVE, LVF, LVX)

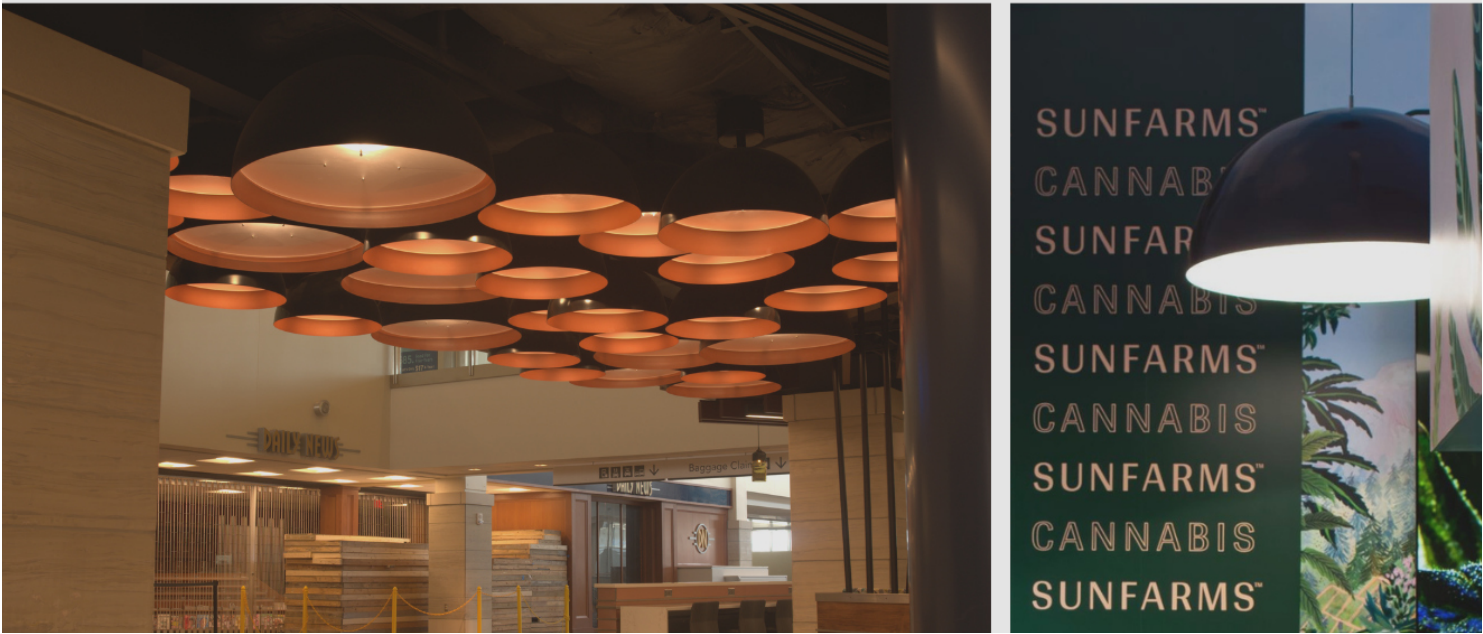





Cylinder Light

| Cat.#        | Max Watt | Dia | Ht  |
|--------------|----------|-----|-----|
| CCL-5-12-1S  | 60W      | 5"  | 12" |
| CCL-5-12-4S  | 60W      | 5"  | 12" |
| CCL-5-12-HSS | 60W      | 5"  | 12" |
| CCL-5-12-NS  | 60W      | 5"  | 12" |
| CCL-5-12-OS  | 60W      | 5"  | 12" |
| CCL-5-12-SL  | 60W      | 5"  | 12" |
| CCL-5-12-VSS | 60W      | 5"  | 12" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC)  
Can be customized in different vented slots style:  
*Simple, Slide, Single Slot, Four Slots, Open Slots, Vertical Slots and Horizontal Slots.*



Datura

| Cat.# | Max Watt | Dia   | Ht  |
|-------|----------|-------|-----|
| DAT10 | 100W     | 10 ½" | 9¾" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)  
Glass version available in our Decorative Commercial offering (see website).



Grand Taper - Alto

| Cat.#            | Max Watt | Dia | Ht  |
|------------------|----------|-----|-----|
| Grand-Taper-Alto | 100W     | 18" | 50" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC)



Grand Taper - Mesa

| Cat.#            | Max Watt | Dia | Ht  |
|------------------|----------|-----|-----|
| Grand-Taper-Mesa | 300W     | 31" | 34" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



Grand Taper - Stella

| Cat.#              | Max Watt | Dia | Ht  |
|--------------------|----------|-----|-----|
| Grand-Taper-Stella | 200W     | 50" | 18" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



John Harvey

| Cat.#  | Max Watt | Dia | Ht  |
|--------|----------|-----|-----|
| JH-912 | 100W     | 12" | 11" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC)



Heat Lamp

| Cat.#       | Max Watt | Dia | Ht  |
|-------------|----------|-----|-----|
| CSRSN-910   | 100W     | 6¾" | 9¾" |
| CSRSN-910VN | 100W     | 6¾" | 9¾" |

Lamp Types: INC, LED (LVE, LVF, LVX)  
\*CSRSN Comes in both non-vented and vented style.



Margherita

| Cat.#  | Max Watt | Dia   | Ht   |
|--------|----------|-------|------|
| MARG11 | 100W     | 11 ½" | 8 ½" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)  
Glass version available in our Decorative Commercial offering (see website).





Nuno

| Cat.#   | Max Watt | Dia | Ht |
|---------|----------|-----|----|
| NUNO-10 | 60W      | 10" | 8" |

Lamp Types: INC, LED (LVF)



Shallow Cone

| Cat.# | Max Watt | Dia | Ht   |
|-------|----------|-----|------|
| 120HX | 100W     | 13" | 6 ½" |
| 160HX | 150W     | 16" | 8 ½" |


Lamp Types: INC, LED (LVE, LVF, LVX, LAC)



Soffione

| Cat.# | Max Watt | Dia | Ht    |
|-------|----------|-----|-------|
| SOF9  | 100W     | 9"  | 10 ½" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC)  
Glass verison available in our Decorative Commerical offering (see website).

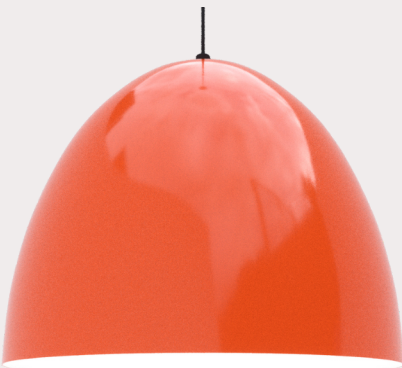

Tenda

| Cat.#  | Max Watt | Dia   | Ht  |
|--------|----------|-------|-----|
| TEND17 | 100W     | 16 ½" | 12" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)  
Glass version available in our Decorative Commercial offering (see website).



Trapez

| Cat.#      | Max Watt | Dia | Ht   |
|------------|----------|-----|------|
| TRAPEZ08   | 60W      | 8"  | 6 ¾" |
| TRAPEZ12   | 60W      | 12" | 9 ¾" |
| TRAPEZ14-S | 60W      | 12" | 9 ¾" |
| TRAPEZ16   | 100W     | 16" | 13"  |
| TRAPEZ20   | 200W     | 20" | 16"  |
| TRAPEZ24   | 300W     | 24" | 19"  |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



YL14

| Cat.# | Max Watt | Dia | Ht    |
|-------|----------|-----|-------|
| YL14  | 60W      | 14" | 10 ¾" |

Lamp Types: INC, LED (LVE, LVF, LVX)



Zella

| Cat.# | Max Watt | Dia | Ht   |
|-------|----------|-----|------|
| ZELLA | 100W     | 10" | 5 ⅝" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC)






Oversized Shades - BB

| Cat.# | Max Watt | Dia | Ht  |
|-------|----------|-----|-----|
| BB24  | 300W     | 24" | 8"  |
| BB36  | 300W     | 36" | 12" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)

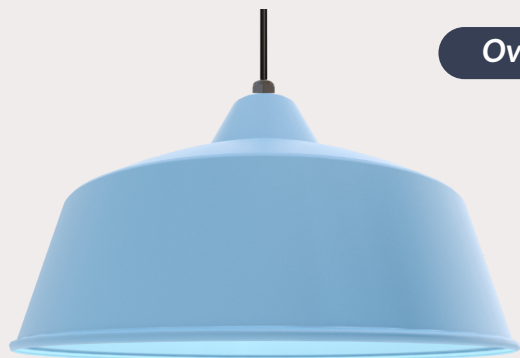

Oversized Shades - BA

| Cat.# | Max Watt | Dia | Ht      |
|-------|----------|-----|---------|
| BA24  | 300W     | 24" | 14"     |
| BA36  | 300W     | 36" | 20 3/8" |
| BA42  | 300W     | 42" | 24"     |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



Oversized Shades - Downlight Reflector

| Cat.# | Max Watt | Dia | Ht      |
|-------|----------|-----|---------|
| 930DL | 300W     | 30" | 0"      |
| 938DL | 300W     | 38" | 28 1/2" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



Oversized Shades - Step Neck Dome

| Cat.# | Max Watt | Dia | Ht      |
|-------|----------|-----|---------|
| SN536 | 300W     | 36" | 21 1/2" |
| SN540 | 300W     | 40" | 24"     |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)



Fixture—Oversized Shades BA





76HC

| Cat.# | Max Watt | Dia   | Ht |
|-------|----------|-------|----|
| 76HC  | 100W     | 14 ½" | 8" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC)

Our Décor RLM Collection blends classic lighting design with a modern touch.

The reflectors are crafted to feel fresh and versatile—smoother, more minimalist, and sometimes a bit more playful—while still delivering the same reliable, performance, and quality as the original RLM fixtures.



The Bock RLM Series reflectors are available in a **hot-dipped galvanized finish**. This shiny, spangled surface, created by dipping the reflectors in a hot zinc bath, offers a dramatic accent, as well as, a protective layer against corrosion and increases fixture durability. There are four (4) shapes available in a galvanized finish.



Radial Wave

| Cat.#  | Max Watt | Dia | Ht   |
|--------|----------|-----|------|
| RW16GV | 100W     | 16" | 6 ¾" |
| RW20GV | 150W     | 20" | 7"   |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC)



Step Neck Angle

| Cat.#   | Max Watt | Dia | Ht    |
|---------|----------|-----|-------|
| SN608GV | 100W     | 8"  | 9 ½"  |
| SN610GV | 150W     | 10" | 12"   |
| SN612GV | 150W     | 12" | 14 ¼" |
| SN614GV | 150W     | 14" | 15"   |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC)



Step Neck Deep Bowl / Downlight

| Cat.#   | Max Watt | Dia | Ht    |
|---------|----------|-----|-------|
| SN908GV | 100W     | 8"  | 7"    |
| SN910GV | 150W     | 10" | 9"    |
| SN912GV | 150W     | 12" | 11"   |
| 918DLGV | 150W     | 18" | 17 ¾" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)




Step Neck Dome

| Cat.#   | Max Watt | Dia | Ht    |
|---------|----------|-----|-------|
| SN512GV | 100W     | 12" | 9"    |
| SN514GV | 150W     | 14" | 9"    |
| SN516GV | 150W     | 16" | 10 ½" |
| SN518GV | 150W     | 18" | 11 ½" |

Lamp Types: INC, LED (LVE, LVF, LVX, LAC, LAH)





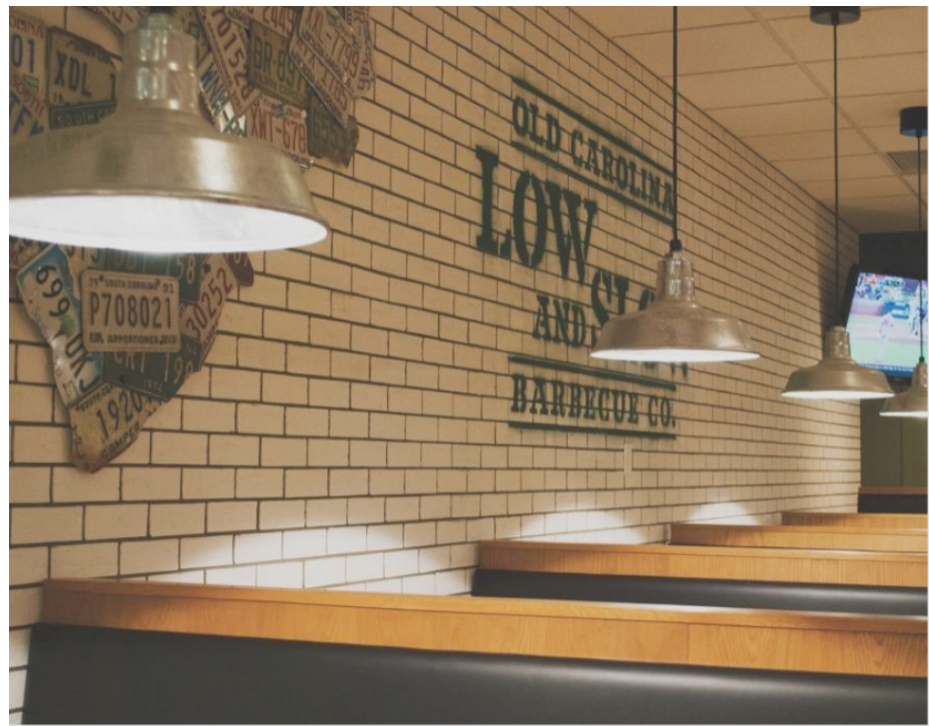


# Metro Series


A contemporary fixture design which accentuates modern architectural schemes. The Metro Series offers a wide variety of light sources, sizes and finishes ensuring the specifier a design choice that will reflect their theme.




## PDL

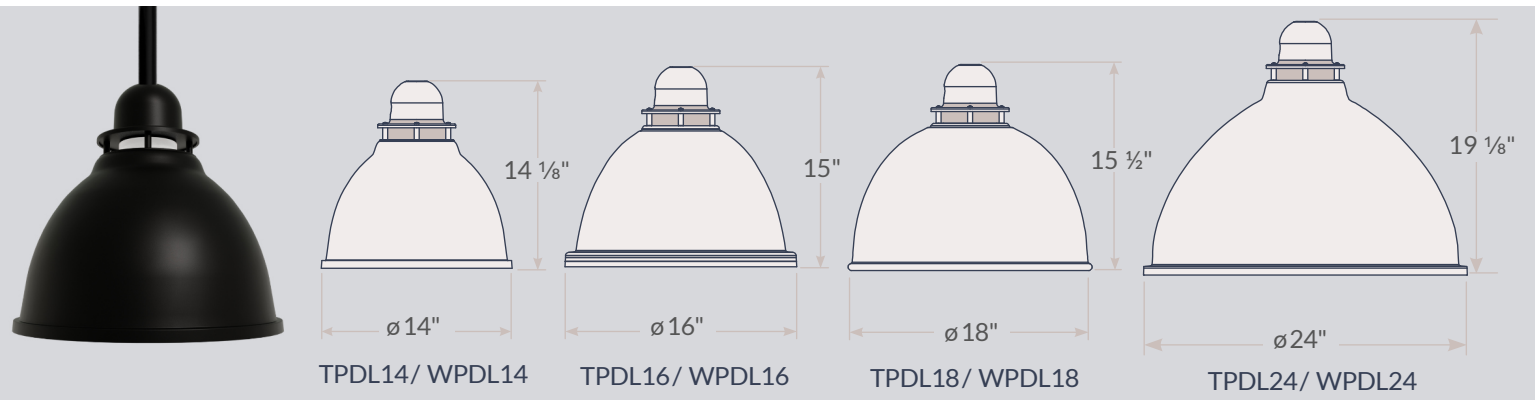

## PLE

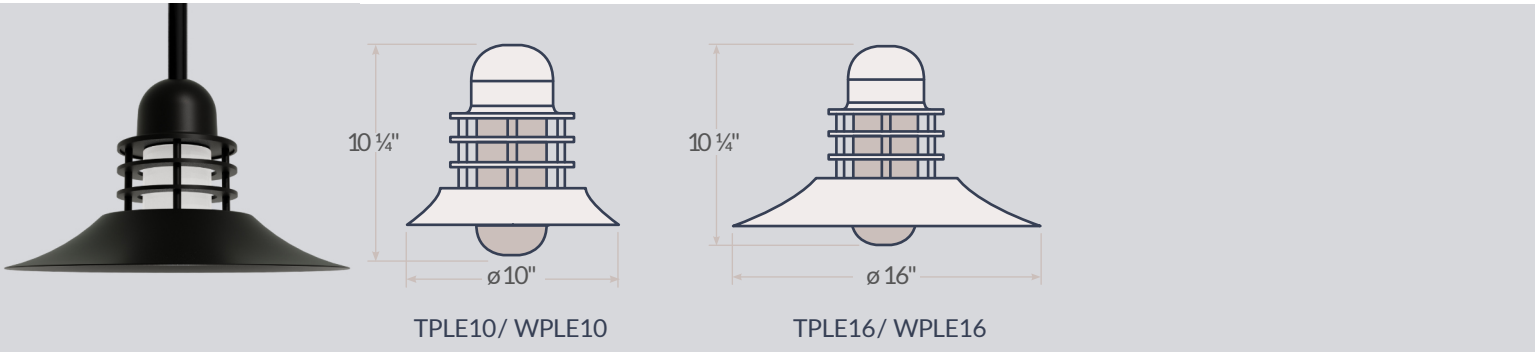


## PLB

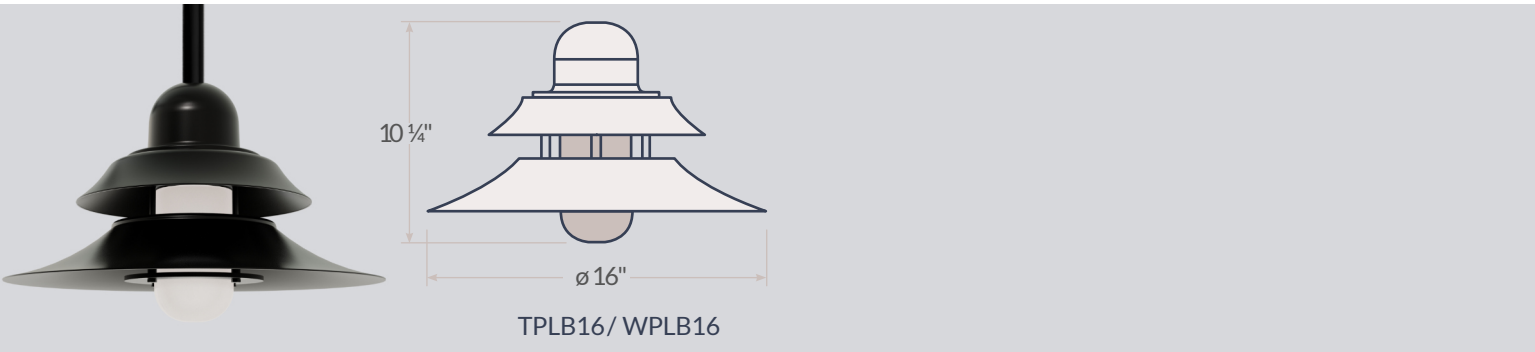




# Metro Series

## PLS

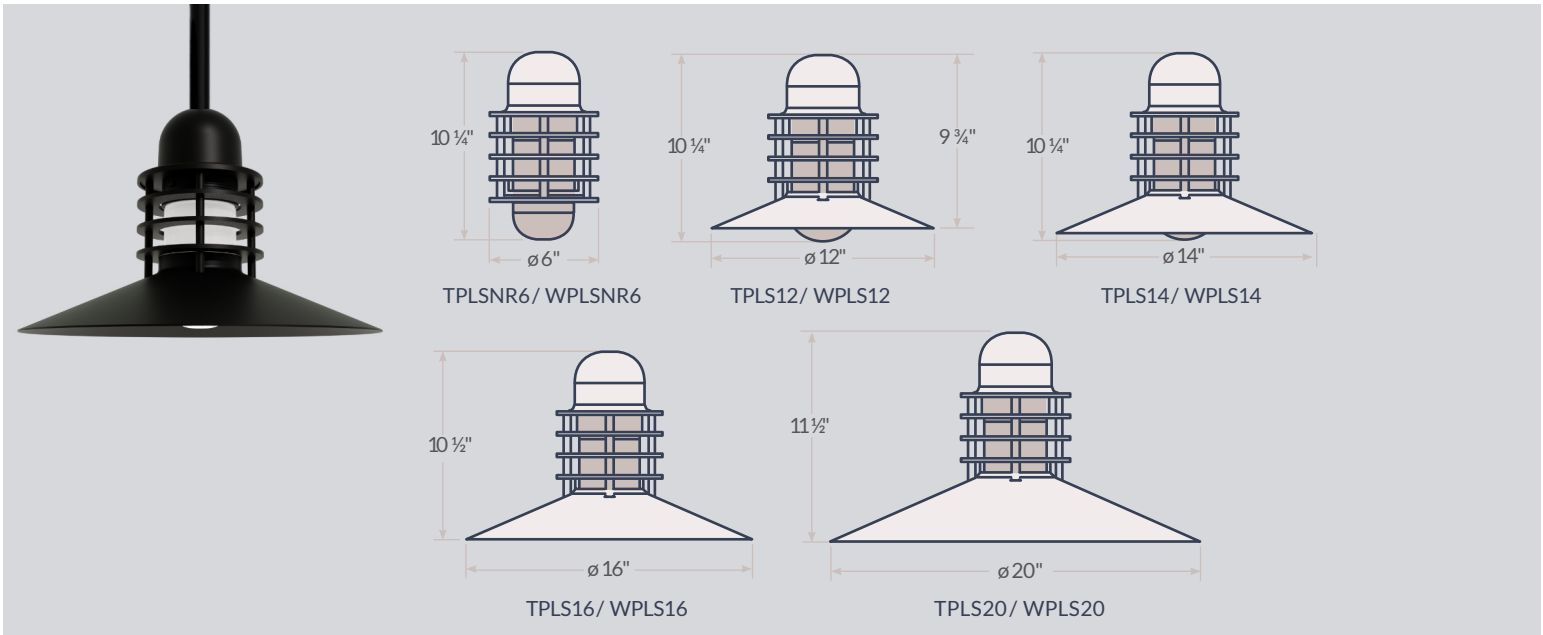


## PLU

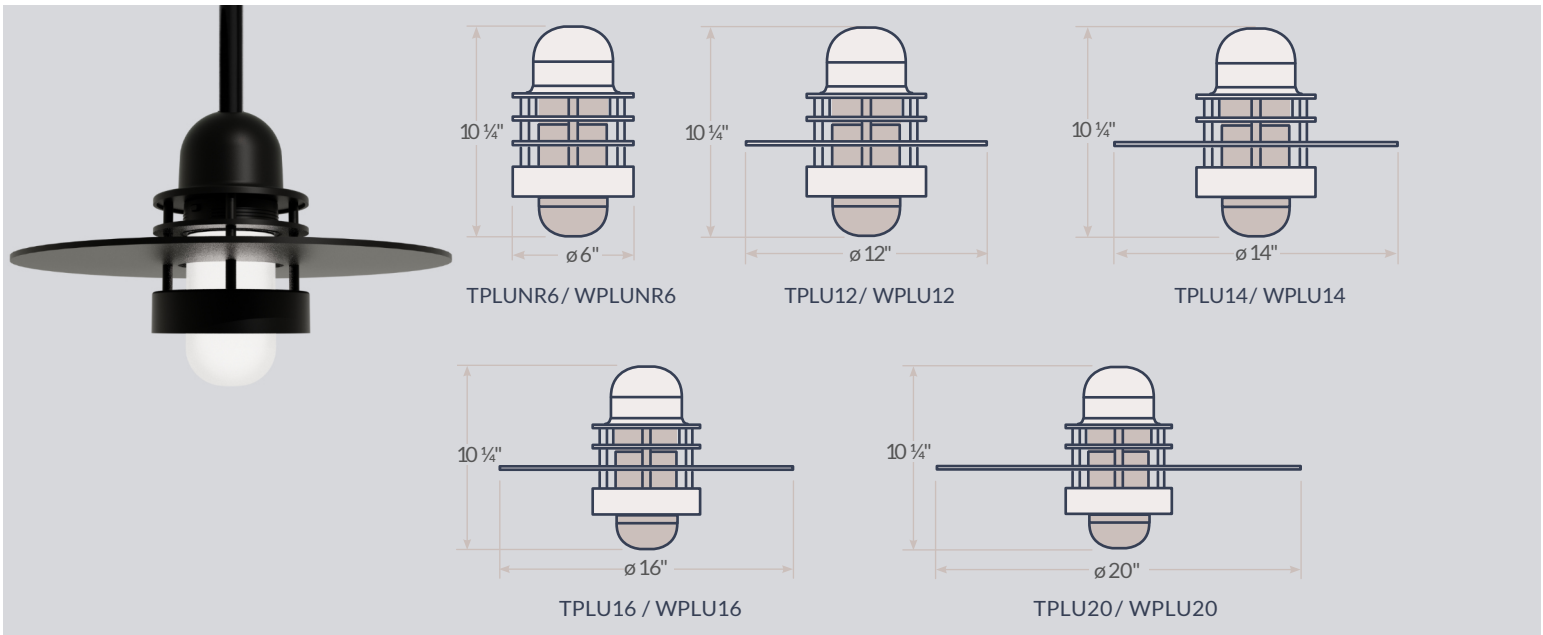

## MOUNTING

Fixtures may be top or side-mounted and are compatible with all 3/4" Bock goose neck, wall, or pole-top brackets. Custom mounting options are available.

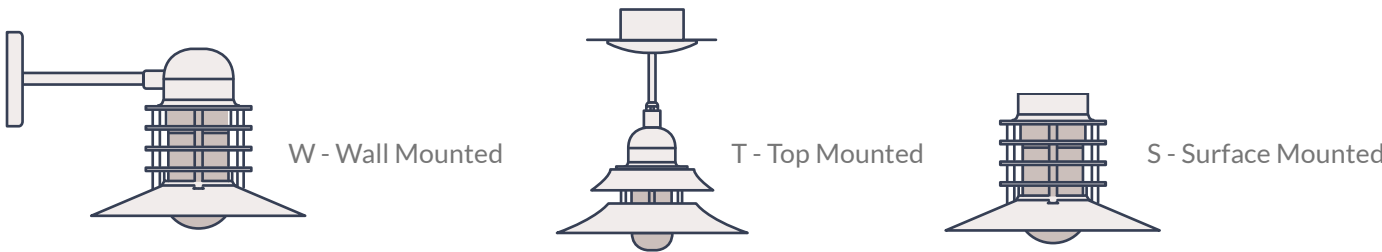

## LAMP TYPE

Compatible with a variety of lamp types and light sources, including: INC, LED (LVE, LVF, LVX) Drivers/ballasts are remotely mounted.

## HOUSING

Heavy gauge spun aluminum.

## GLASS GLOBE

41 style glass globe required. Complete 41 globe offering can be found on page 41.









# Standard Powder Coat Colors

## What is Powder Coating?

Powder coating is the process of coating a surface in which a powder is electrically charged to metal. The applied powder is then heated (cured) to its melting point. It flows to form a smooth film which cools to a firm, durable finish very resistant to scratches, cracking, peeling, UV rays, and rust.

|                                                                                      |                                                                                      |                                                                                      |                                                                                      |                                                                                      |                                                                                      |                                                                                     |                                                                                     |
|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|   |   |   |   |   |   |  |  |
| G0<br>Black                                                                          | G1<br>White                                                                          | G2<br>Red                                                                            | G3<br>Yellow                                                                         | G4<br>Blue                                                                           | G5<br>Green                                                                          | G6<br>Brown                                                                         | G7<br>Verdigris                                                                     |
|   |   |   |   |   |   |  |  |
| G8<br>Dark Bronze                                                                    | G9<br>Silvadillo                                                                     | G10<br>Dark Green                                                                    | G11<br>Copper                                                                        | G12<br>Brushed Aluminum                                                              | G14<br>Gun Metal                                                                     | G15<br>Rust                                                                         | G16<br>Silver Wrinkle                                                               |
|   |   |   |   |   |   |  |  |
| G17<br>Architectural Bronze                                                          | G20<br>Silver Cast                                                                   | G21<br>Hammered Copper                                                               | G22<br>Dark Platinum                                                                 | G24<br>Orange                                                                        | G25<br>Navy Blue                                                                     | G27<br>Matte Black                                                                  | G28<br>Sun Gold                                                                     |
|  |  |  |  |  |  |                                                                                     |                                                                                     |
| G29<br>Brilliant Blue                                                                | G30<br>Glossy Black                                                                  | G50<br>Neon Orange                                                                   | G51<br>Neon Pink                                                                     | G52<br>Neon Yellow                                                                   | G53<br>Neon Lime Green                                                               |                                                                                     |                                                                                     |

## NEW Standard Finishes - Earth Palette!

These warm muted colors are inspired by the Earth's natural hues! This new standard palette conveys warmth and comfort. Perfect for your next design project, these Earth tones can be used in rustic & traditional projects but can also be integrated into modern & minimalist designs!

|                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| G41<br>Sand                                                                           | G42<br>Pastel Blue                                                                    | G43<br>Pale Green                                                                     | G44<br>Oxblood                                                                        | G45<br>Emerald                                                                        |

## TRIM FINISH

Add a trim color to the rim of the RLM shade.  
 -trWH = White Trim  
 -trBK = Black Trim



The printed color samples shown are subject to various effects of printing and may vary slightly from the actual painted product.  
**Color swatches available upon request.**

**BUILDING PART EXAMPLE: 516-G1-trBK**



# Lamp Type


Selecting the proper light source for your RLM is key. Bock offers many different light source options to meet your project’s needs. The classic medium base socket is standard on all RLMs. We use the highest quality two piece glazed porcelain socket, that will last for decades to come. We also offer the latest in LED technology with a vast selection of light outputs and color temperature.

## SOCKETS

- MED5 Medium Base Socket, Heavy duty porcelain with spring loaded center contact and lamp grip screwshell.
- GU24 Lamp Socket with Snap-In Clip and 18in.

**Specialty** - Special, international & legacy sockets types.

- MOG6 Mogul Base Socket, Heavy duty porcelain with spring loaded center contact and lamp grip screwshell.
- GX24Q GX24q-3 Lamp Base 4-Pin Screw-Down.
- LVET LED module meets the Florida Wildlife Turtle Standards. 20W UNV Turtle Safe LED.

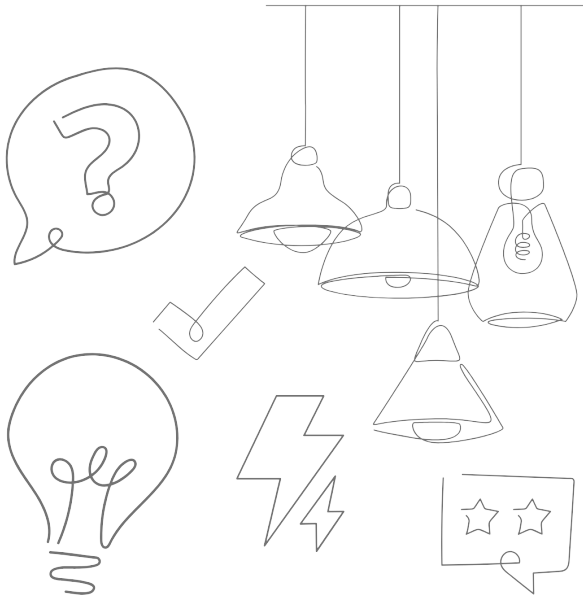

## LED MODULES

We provide a wide range of LED modules to fit all application needs, from high-output performance to decorative options with a Jelly Jar. Our selection includes solutions for both indoor and outdoor applications. By partnering with leading LED and driver manufacturers, we deliver efficient, long-lasting, and high-quality lighting. Our LED offering is continually updated. For the latest options, please visit [www.BockLighting.com/LED](http://www.BockLighting.com/LED).

### LVF

| FEATURES      |                                                          |
|---------------|----------------------------------------------------------|
| LED           | Bridgelux Vero SE 18 Series                              |
| LUMEN         | 1250(10W), 1500(12W), 1700(14W), 2000(17W)               |
| KELVIN        | 27, 30, 35, 40, 50K Standard                             |
| CRI           | 90CRI                                                    |
| DRIVER        | AC Electronics, 120/277V, 0-10V Dimming down to 5%       |
| DIMMING       | 0-10V, 5% - When Requested                               |
| VOLTAGE       | 120 - 277VAC                                             |
| INSTALL       | Driver goes inside jbox                                  |
| CERTIFICATION | cULus - Fixture manufactured to UL Standards 1598 & 8750 |



### LVX

| FEATURES      |                                                          |
|---------------|----------------------------------------------------------|
| LED           | Bridgelux Vero SE 18 Series                              |
| LUMEN         | 1250(10W), 1500(12W), 1700(14W), 2000(17W)               |
| KELVIN        | 27, 30, 35,40, 50K Standard                              |
| CRI           | 90CRI                                                    |
| DRIVER        | AC Electronics, 120/277V, 0-10V Dimming down to 5%       |
| DIMMING       | 0-10V, 5% - When Requested                               |
| VOLTAGE       | 120 - 277VAC                                             |
| INSTALL       | Driver goes inside fixture                               |
| CERTIFICATION | cULus - Fixture manufactured to UL Standards 1598 & 8750 |



### LVE

| FEATURES      |                                                    |
|---------------|----------------------------------------------------|
| LED           | Bridgelux Vero SE 18 Series                        |
| LUMEN         | 1700(14W), 2000(16W), 2500(21W), 3000(26W)         |
| KELVIN        | 27, 30, 35, 40, 50K Standard                       |
| CRI           | 90CRI                                              |
| DRIVER        | ERP PSB Series, 120/277V, 0-10V Dimming down to 1% |
| DIMMING       | 0-10V, 1% - When Requested                         |
| VOLTAGE       | 120 - 277VAC                                       |
| CERTIFICATION | cULus                                              |



### LVET

| FEATURES      |                                           |
|---------------|-------------------------------------------|
| LED           | UNV Turtle Safe LED.                      |
| LUMEN         | 20W                                       |
| NANOMETER     | Wavelength560nm                           |
| CRI           | N/A                                       |
| DRIVER        | ERP PSB Driver                            |
| DIMMING       | 0-10V Dimming                             |
| VOLTAGE       | 120-277V                                  |
| CERTIFICATION | cULus, Florida Wildlife Turtle Standards. |





Lamp Type

LAC

| FEATURES      |                                                   |                               |
|---------------|---------------------------------------------------|-------------------------------|
| TYPE          | LAC02 - 23W                                       | LAC03 - 23W                   |
| LUMEN         | 1500, 1850, or 2400LM                             | 1650, 2050, or 2750LM         |
| KELVIN        | 3000, 3500, 4000, 5000K                           | 2700, 3000, 3500, 4000, 5000K |
| CRI           | 80CRI                                             | 90CRI                         |
| JELLY JAR     | 41 Glass Jar Compatible                           |                               |
| GUARD         | Compatible with 31DCG Cast Guard and 31 Wireguard |                               |
| DIMMING       | 0-10V Down to 10%                                 |                               |
| VOLTAGE       | 120-277V 50/60Hz                                  |                               |
| COLOR         | White                                             |                               |
| CERTIFICATION | cULus                                             |                               |
|               | Indoor/Outdoor compatible                         |                               |
|               | Fits in fixtures 12in and larger                  |                               |

LAH

| FEATURES      |                                                   |                               |
|---------------|---------------------------------------------------|-------------------------------|
| TYPE          | LAH01 - 23W                                       | LAH02 - 43W                   |
| LUMEN         | 3000, 4000, or 5000LM                             | 3300, 4100, or 5250LM         |
| KELVIN        | 3000, 3500, 4000, 5000K                           | 2700, 3000, 3500, 4000, 5000K |
| CRI           | 80CRI                                             | 90CRI                         |
| JELLY JAR     | 42 Glass Jar Compatible                           |                               |
| GUARD         | Compatible with 32DCG Cast Guard and 32 Wireguard |                               |
| DIMMING       | 0-10V Down to 10%                                 |                               |
| VOLTAGE       | 120-277V 50/60Hz                                  |                               |
| COLOR         | White                                             |                               |
| CERTIFICATION | cULus                                             |                               |
|               | Indoor/Outdoor compatible                         |                               |
|               | Fits in fixtures 16in and larger                  |                               |



COLOR  
TEMPERATURE  
CONTROL


INDOOR OR  
OUTDOOR  
COMPATIBLE

DECORATIVE,  
STYLISH AND  
CUSTOMIZABLE

LISTED  
CULUS  
CERTIFICATION




- Efficiency and durability
- Safety from electrical hazard
- Rust and corrosion protection
- Chip resistant
- Reduction of light loss
- Easy re-lamping
- Low cost installation
- Exceptionally low maintenance cost
- High light output efficiency
- Quality construction
- Shielding from glare
- Seeing comfort
- Balanced lighting

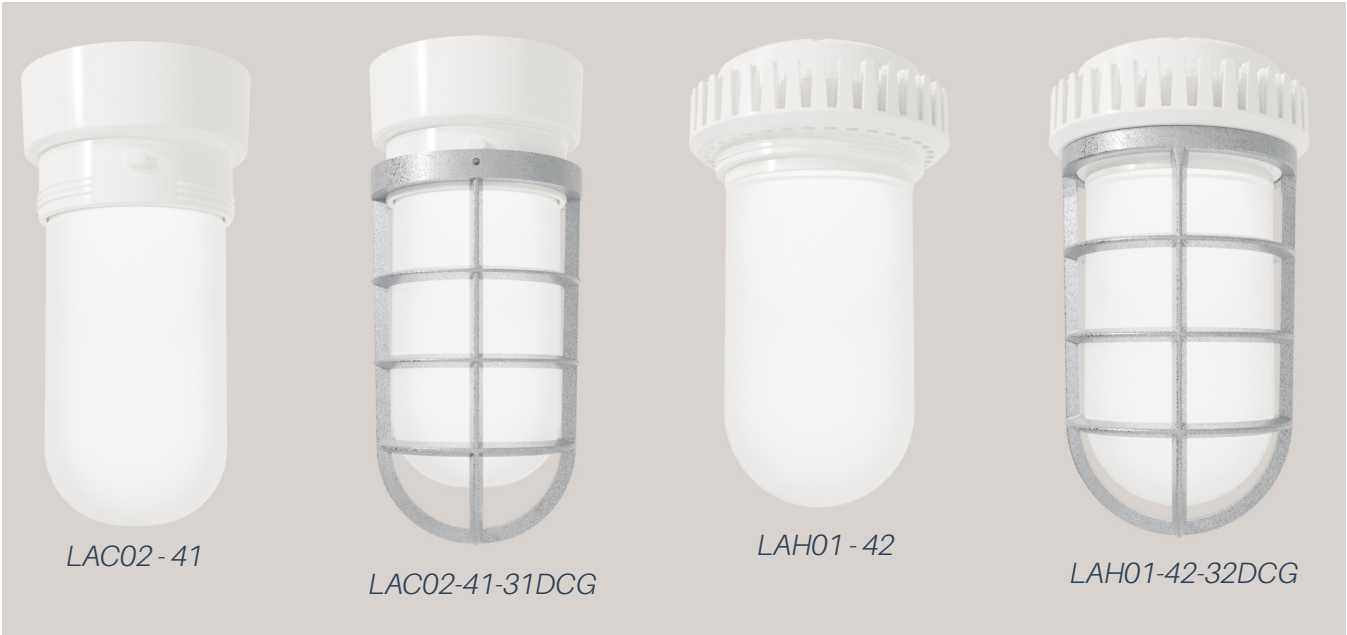



# Driver/Ballast Enclosures

## BCW6

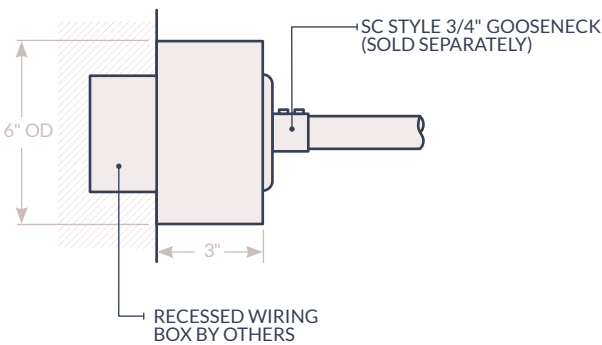


### "SC" GOOSENECKS

- >For use only with "SC" style gooseneck brackets.
- >For use with LED drivers.
- >Finished in polyester powder coat.
- >Mounts to recessed wiring box. (Box by others.)
- >cULus Listed for Wet Locations.

Building Part: BCW6-Finish

## BCC6A

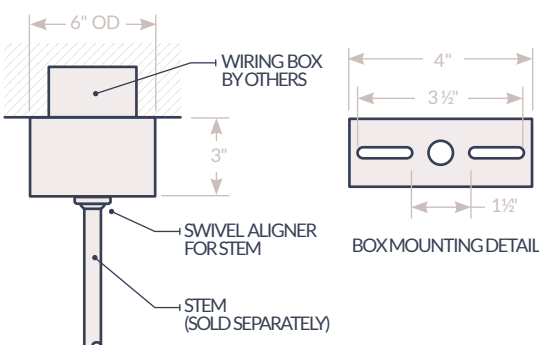


### SWIVEL MOUNT STEM CANOPY

- >For use only with 1/2" or 3/4" stem mounted fixtures. Stem sold separately.
- >45° angle is the maximum slope.
- >For use with LED drivers.
- >Finished powder coat.
- >Mounts to recessed wiring box. (Box by others.)
- >cULus Listed for Damp Locations.

Building Part: BCC6A-Thread Size-Finish

## BCC6S

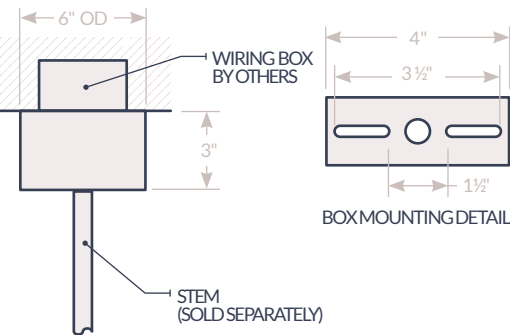


### RIGID MOUNT STEM CANOPY

- >For use only with 1/2" or 3/4" stem mounted fixtures. Stem sold separately.
- >For use with LED drivers.
- >Finished in polyester powder coat.
- >Mounts to recessed wiring box. (Box by others.)
- >cULus Listed for Damp Locations.

Building Part: BCC6S-Thread Size-Finish

## BDC6C

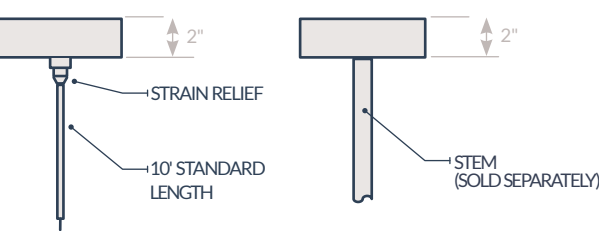


### LOW PROFILE CORD& STEM CANOPY

- >For use with Compact Form LEDDrivers.
- >Finished powder coat.
- >Mounts to recessed wiring box. (Box by others.)
- >cULus Listed for Damp Locations.

Building Part: BCC6C-CordColor-Finish

Some RLM Series reflectors may require an enclosure around the lamp or light source for aesthetics, utility, or safety. Bock Lighting offers several styles and colors of enclosures, including globes, jelly jars, wire guards, and die cast aluminum guards.

### Glass Globes

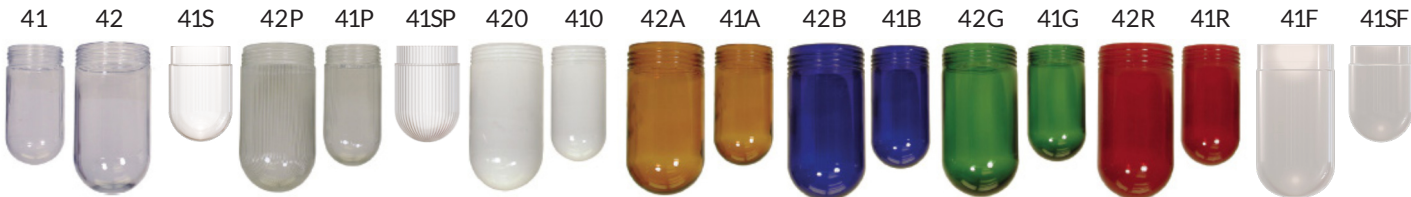



### Lexan Globes



Colors available for signaling or decorative applications. Mix colored globes with RLMs fixture finishes for unique color combinations. Lexan globes are made of UV protected polycarbonate.

Polycarbonate enclosures are not compatible with die cast guards\*\*

### Ball Globes

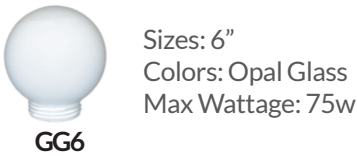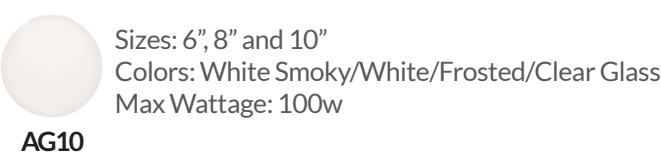

Not compatible with cast guards\*\*


|                          | MEDIUM BASE (W) |          | LED (W)  |          | GU24 (W) |          |
|--------------------------|-----------------|----------|----------|----------|----------|----------|
| MAXIMUM WATTAGE          | 41 GLOBE        | 42 GLOBE | 41 GLOBE | 42 GLOBE | 41 GLOBE | 42 GLOBE |
| Clear or Prismatic Glass | 150             | 300      | 16       | 16       | 15       | 26       |
| Colored Glass            | 100             | 200      | 16       | 16       | 15       | 26       |
| Clear or Prismatic Lexan | 75              | 150      | 16       | 16       | 15       | 26       |
| Colored Lexan            | 60              | 75       | 16       | 16       | 15       | 26       |



# Mounting

## Guards

### DIE CAST GUARD




31DCG 32DCG

**SMALL**  
Width: 4.2in  
Height: 7.3in

**LARGE**  
Width: 5.7in  
Height: 9in

### WIRE GUARD




31WG 32WG

**SMALL**  
Width: 4.1in  
Height: 7in

**LARGE**  
Width: 5.8in  
Height: 9.1in

### REFLECTOR WIRE GUARD

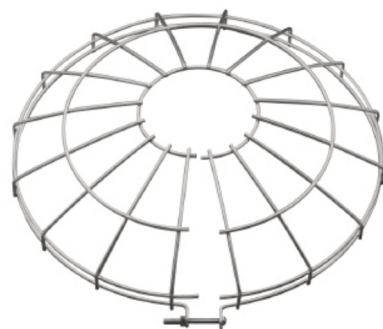

Standard finish is bright zinc or powder coating.

| Cat. # | Compatible with                      | Dia. | Depth |
|--------|--------------------------------------|------|-------|
| 108AR  | SN608, 6208, SN908                   | 8"   | 2"    |
| 110AR  | 110B, SN610, 6210, SN910             | 10"  | 2"    |
| 112AR  | 312OB, 412, 512, SN612, 6212, SN912  | 12"  | 2"    |
| 113AR  | 6214                                 | 13"  | 2"    |
| 114AR  | 314OB, 414, 514, SN514, SN614, 914DL | 14"  | 2 ½"  |
| 115AR  | 116B                                 | 15"  | 2 ½"  |
| 116AR  | 316OB, 416, 516, SN516, 516B         | 16"  | 2 ½"  |
| 118AR  | 518, SN518                           | 18"  | 3"    |
| 120AR  | 120B, 520, 520B, SN520               | 20"  | 3"    |
| 4GR16  | 916DL, 916B                          | 17"  | 2 ½"  |
| 4GR18  | 918DL, 918UL                         | 19"  | 3"    |
| 4GR24  | SN524, 924DL                         | 24"  | 3"    |

## Canopies

### 630S-50 CANOPY



Stem mounting available for ½" N.P.T. pipe. Canopy is held in place with a slip ring. Canopy is 5 5/8" Dia. x 1" deep. Kit for mounting to 4" octagon box included. To order stems see below. Reflectors ordered with stems and canopies are factory wired and are suitable for damp location. Be sure thread sizes of canopy, stem and reflector hub all match.

**NOTE:** If installed outdoors use a thread sealant on all threads.

630S-50 = ½" NPT Canopy

**Building Part:** 630S-50-NPT-Color

### 630S-75 CANOPY



Stem aligner is 5 5/8" Dia. x 1" deep. Self aligning aluminum die cast aligner fits 4" octagon box or Bock cast boxes and accommodate ¾" N.P.T. pipe. Maximum travel 45°. Be sure thread size of canopy, stem and reflector hub all match.

**NOTE:** If installed outdoors use a thread sealant on all threads.

630S-75 = ¾" NPT Canopy with Aligner

**Building Part:** 630S-75-NPT-Color

## Stems

Pipe 1/2" or 3/4" threaded N.P.T. both ends.

| Stem Length | Cat.# Stem Size |         |
|-------------|-----------------|---------|
|             | ½" Pipe         | ¾" Pipe |
| 12"         | ST2-12          | ST3-12  |
| 24"         | ST2-24          | ST3-24  |
| 36"         | ST2-36          | ST3-36  |
| 48"         | ST2-48          | ST3-48  |
| 60"         | ST2-60          | ST3-60  |
| 72"         | ST2-72          | ST3-72  |
| 96"         | ST2-96          | ST3-96  |

Additional lengths available on request, Consult Factory. If installed outdoors use a thread sealant on all threads. Be sure thread size of reflector and stem both match.

**Building Part:** Thread Size-Stem Length-Color





# Mounting Types

## Cords

### 630C



Cord suspension with canopy permanently attached with 2 mounting screws. Supplied with 10' of 18 gauge cord. Canopy is 4.5" Dia. x 0.375" deep. Kit for mounting to 4" octagon box and SRW strain relief included.

**Building Part:** 630C-Color-Cord Color

### 630C-1AC



Cord suspension with canopy permanently attached with 2 mounting screws. Supplied with 10' of 18 gauge cord. Canopy is 4.5" Dia. x 0.375" deep. Kit for mounting to 4" octagon box and SRW strain relief included.

**Building Part:** 630C-1AC-Color-Cord Color

### 630C-3AC



Cord suspension with canopy permanently attached with 2 mounting screws. Supplied with 10' of 18 gauge cord. Canopy is 4.5" Dia. x 0.375" deep. Kit for mounting to 4" octagon box and SRW strain relief included. Designed to accommodate up to three aircraft cables, providing secure suspension for our heaviest fixtures.

**Building Part:** 630C-3AC-Color-Cord Color



## Chain

### CHN-8FT



Chain suspension with canopy supplied with 10' of 18 gauge 3 conductor cord and chain. Canopy is 5 5/8" Dia. x 1" deep. Kit for mounting to 4" octagon box.

**Chain Finishes:** Brass, Silver  
**Chain Size:** 8ft or 16ft

**Building Part:** CHN-8FT-Chain Finish-Canopy Finish-Cord Color





# Cloth Cords Colors




The printed color samples shown are subject to various effects of printing and may vary slightly from the actual painted product. Color swatches available upon request.

# Mounting Gooseneck

## Gooseneck Pipe Brackets


### For Outlet Box and Wall Mounting

Gooseneck Brackets made of 3/4" schedule 40 aluminum tubing threaded 3/4-14 N.P.T. on fixture end. These brackets are designed for recessed box or surface outlet box mounting. The bracket end slips into cast box cover plate (wall end is unthreaded). The pipe may be cut down, in the field, to shorten bracket length. RLMs supplied with these brackets are Underwriters Laboratories Inc.® Listed for Wet Locations provided they are installed in accordance with local and national codes. If installed outdoors use a thread sealant on fixture end threads to prevent water entry.

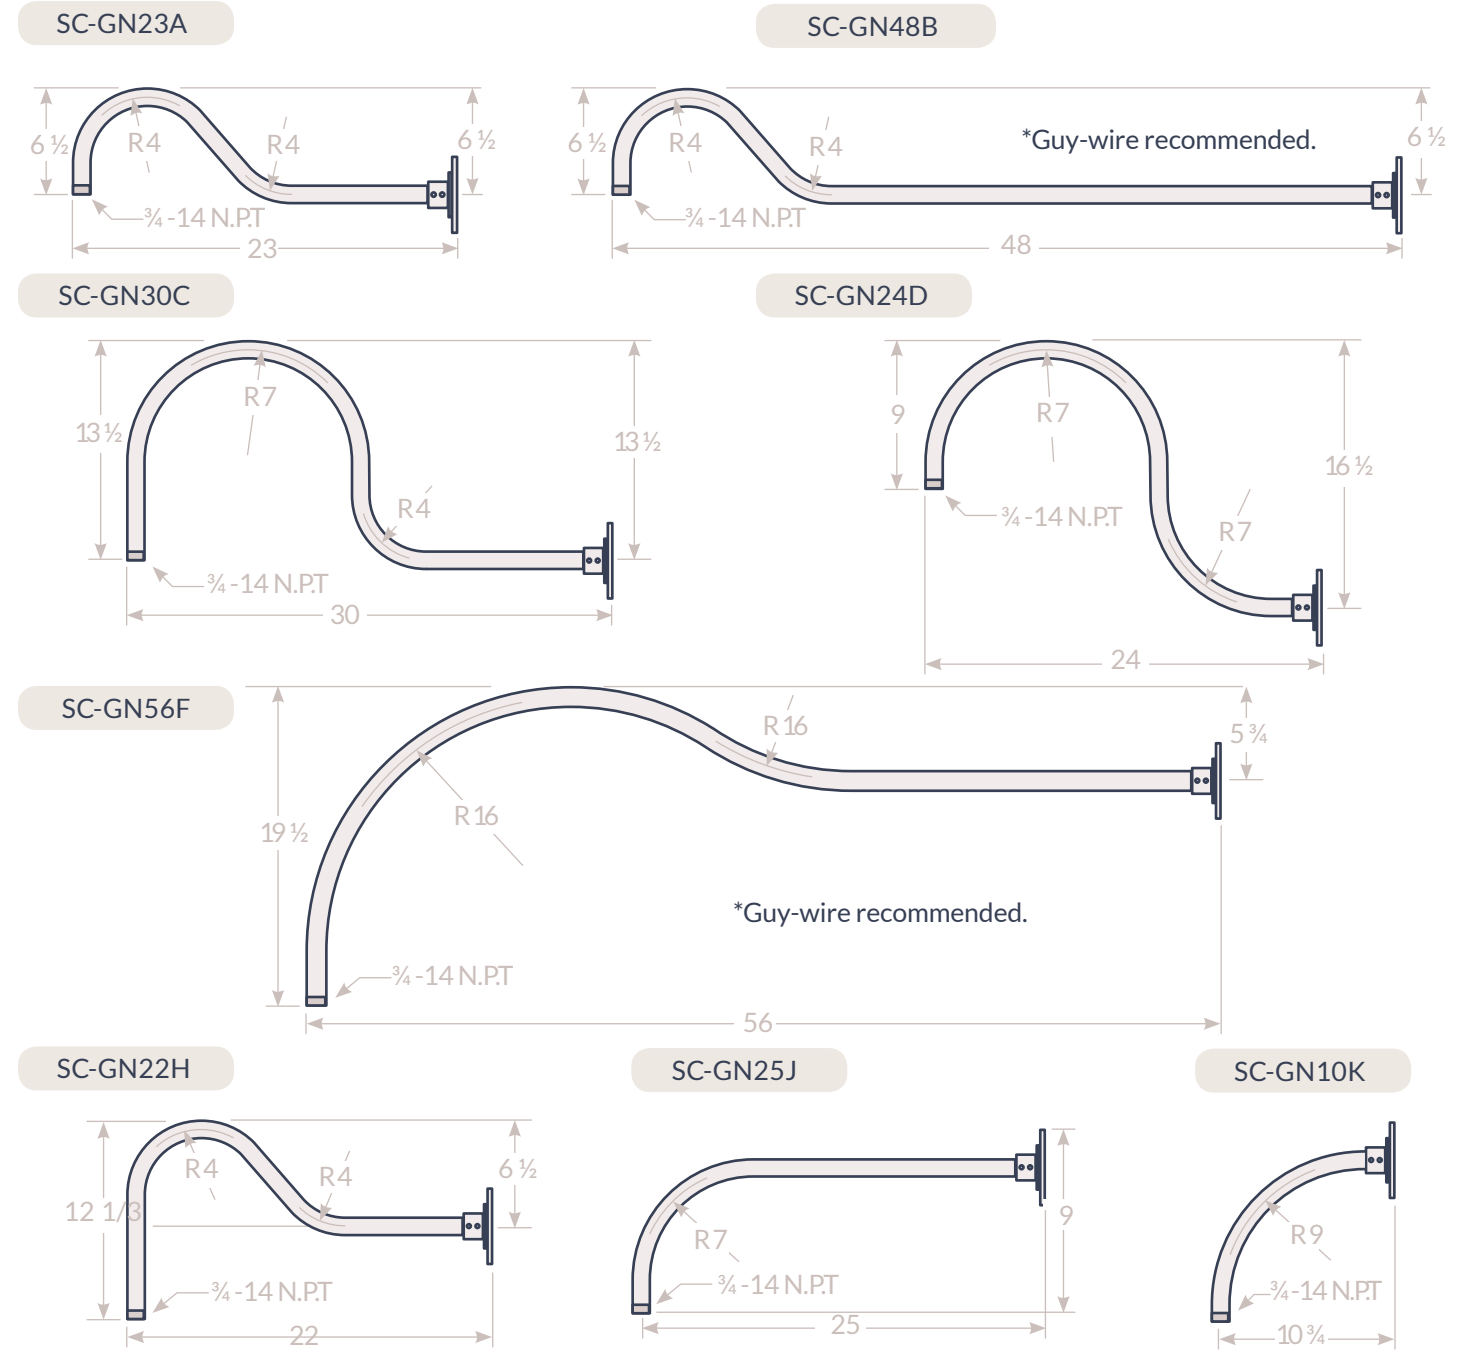



# Mounting Types

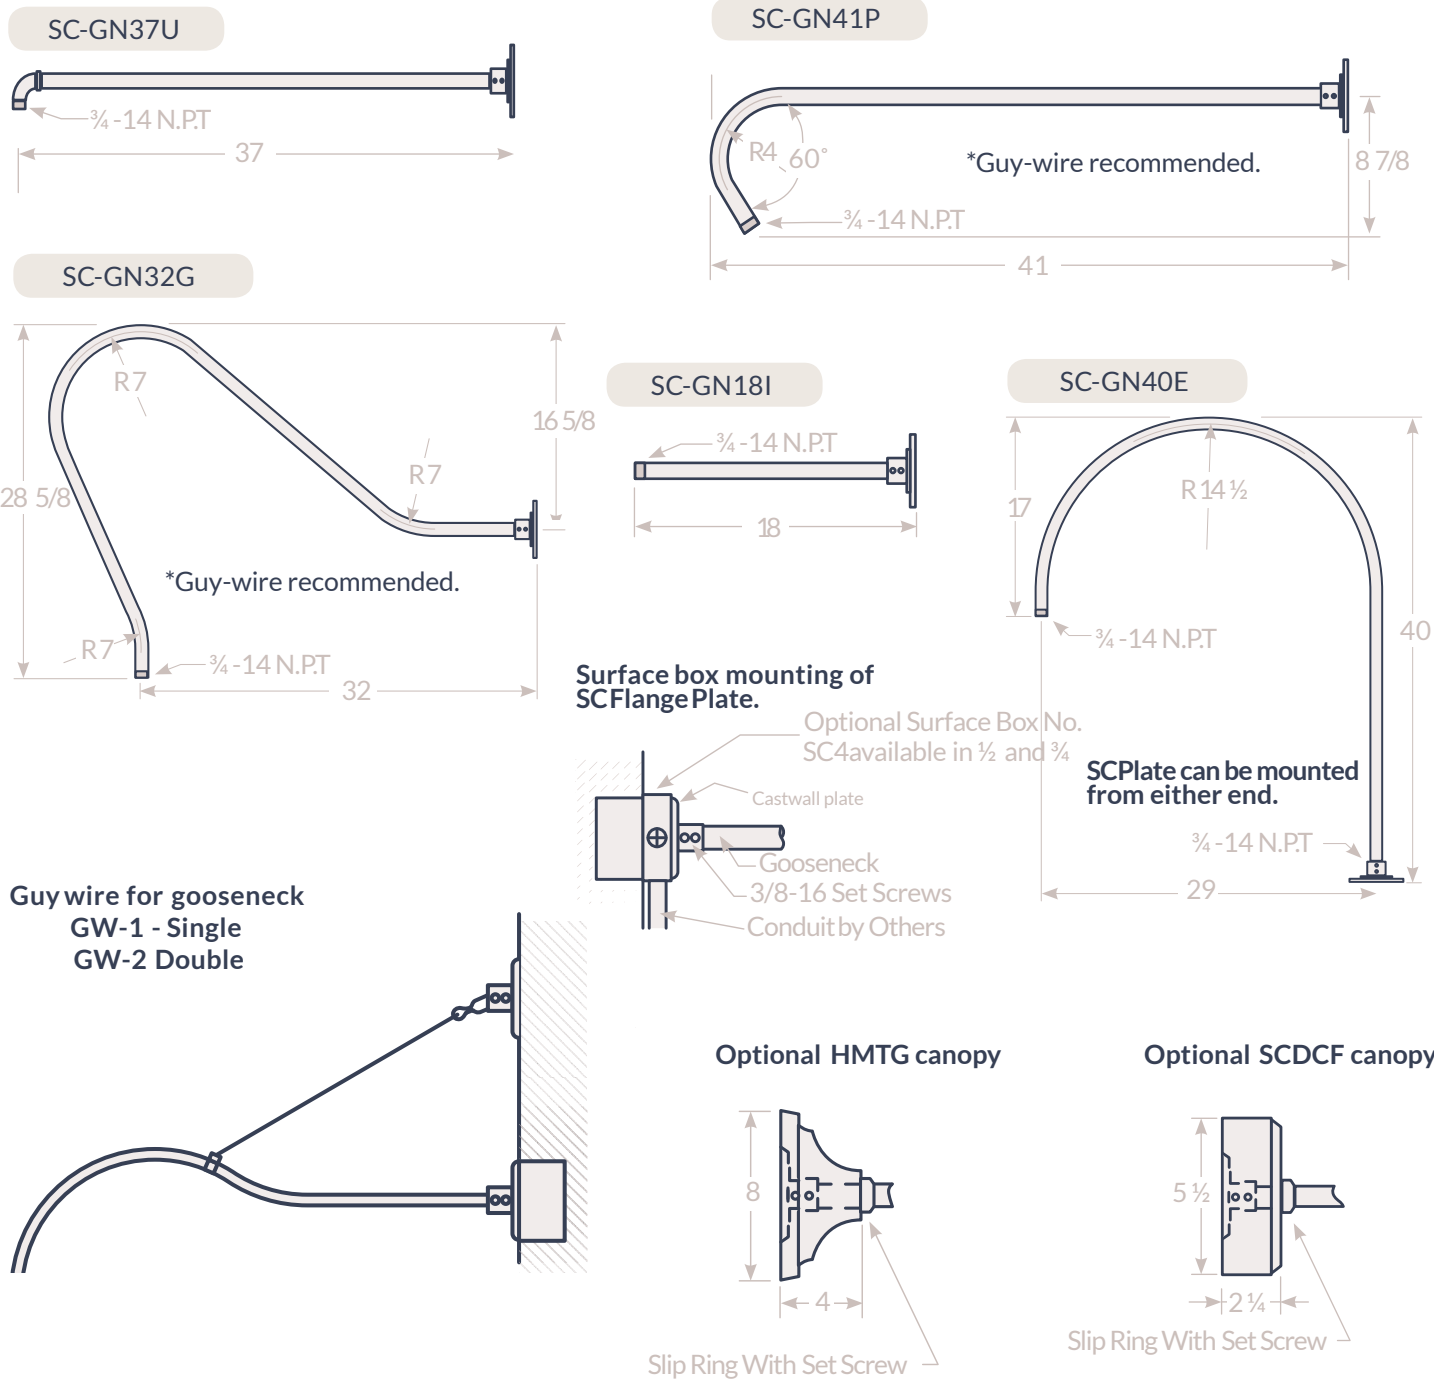


**Don't see the Gooseneck you need?**  
We have a larger selection of goosenecks on our website. Bock fabricates goosenecks in house and can make the gooseneck to your applications needs. Just send us a sketch of what you are looking for and we'll fabricate it to your needs.

## Gooseneck Pipe Brackets


### For Pole Top and Wall Mounting

Pipe made of 3/4" schedule 40 aluminum tubing threaded N.P.T on fixture end. Slipfitter supplied with 3/8-16 Stainless Steel set screws and will fit 3" O.D tenon. The aluminum scroll, if furnished, is attached to both the pipe and fitter portions of the bracket. Wall brackets are designed for a recessed outlet box. Surface conduit boxes are available. RLMs supplied with these brackets are Underwriter's Laboratories Inc.® Listed "Suitable for Wet Locations" provided they are installed in accordance with local and national codes. If installed outdoors use a thread sealant on fixture end threads to prevent water entry.

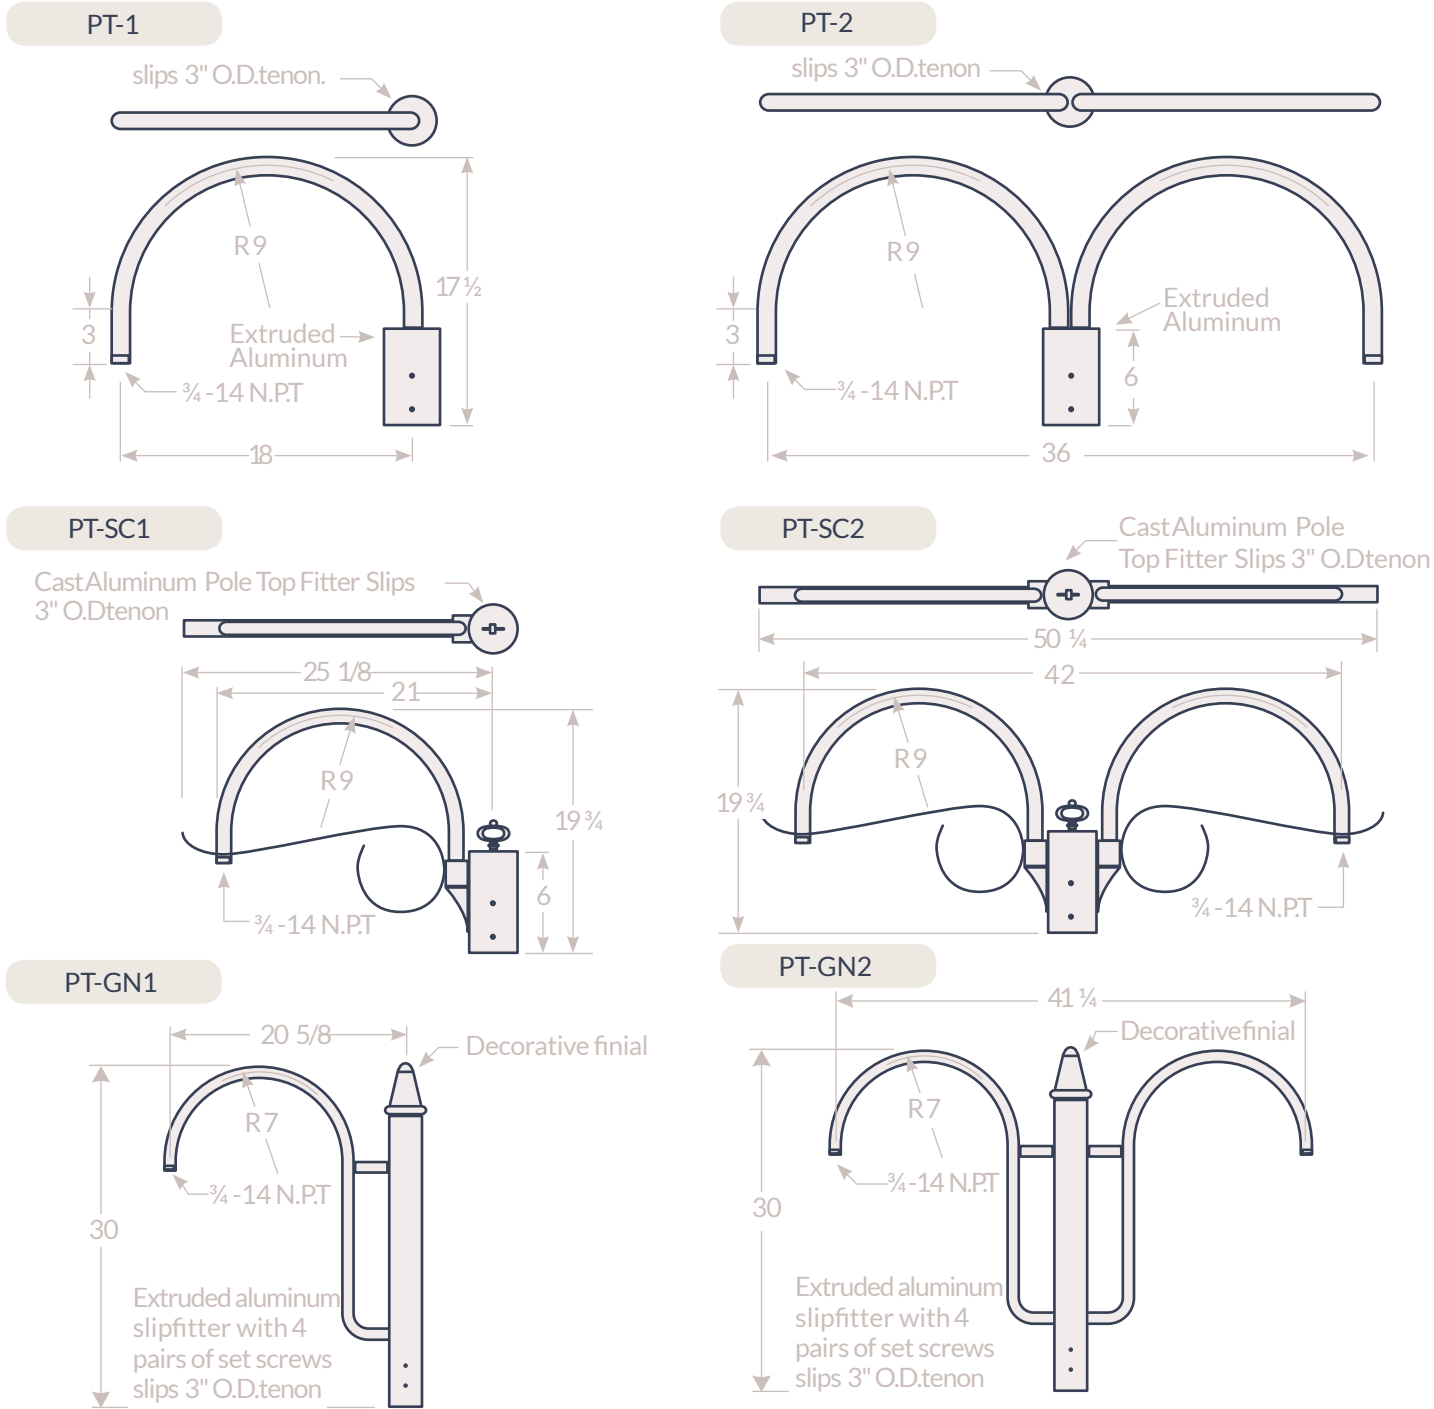



# Mounting Types

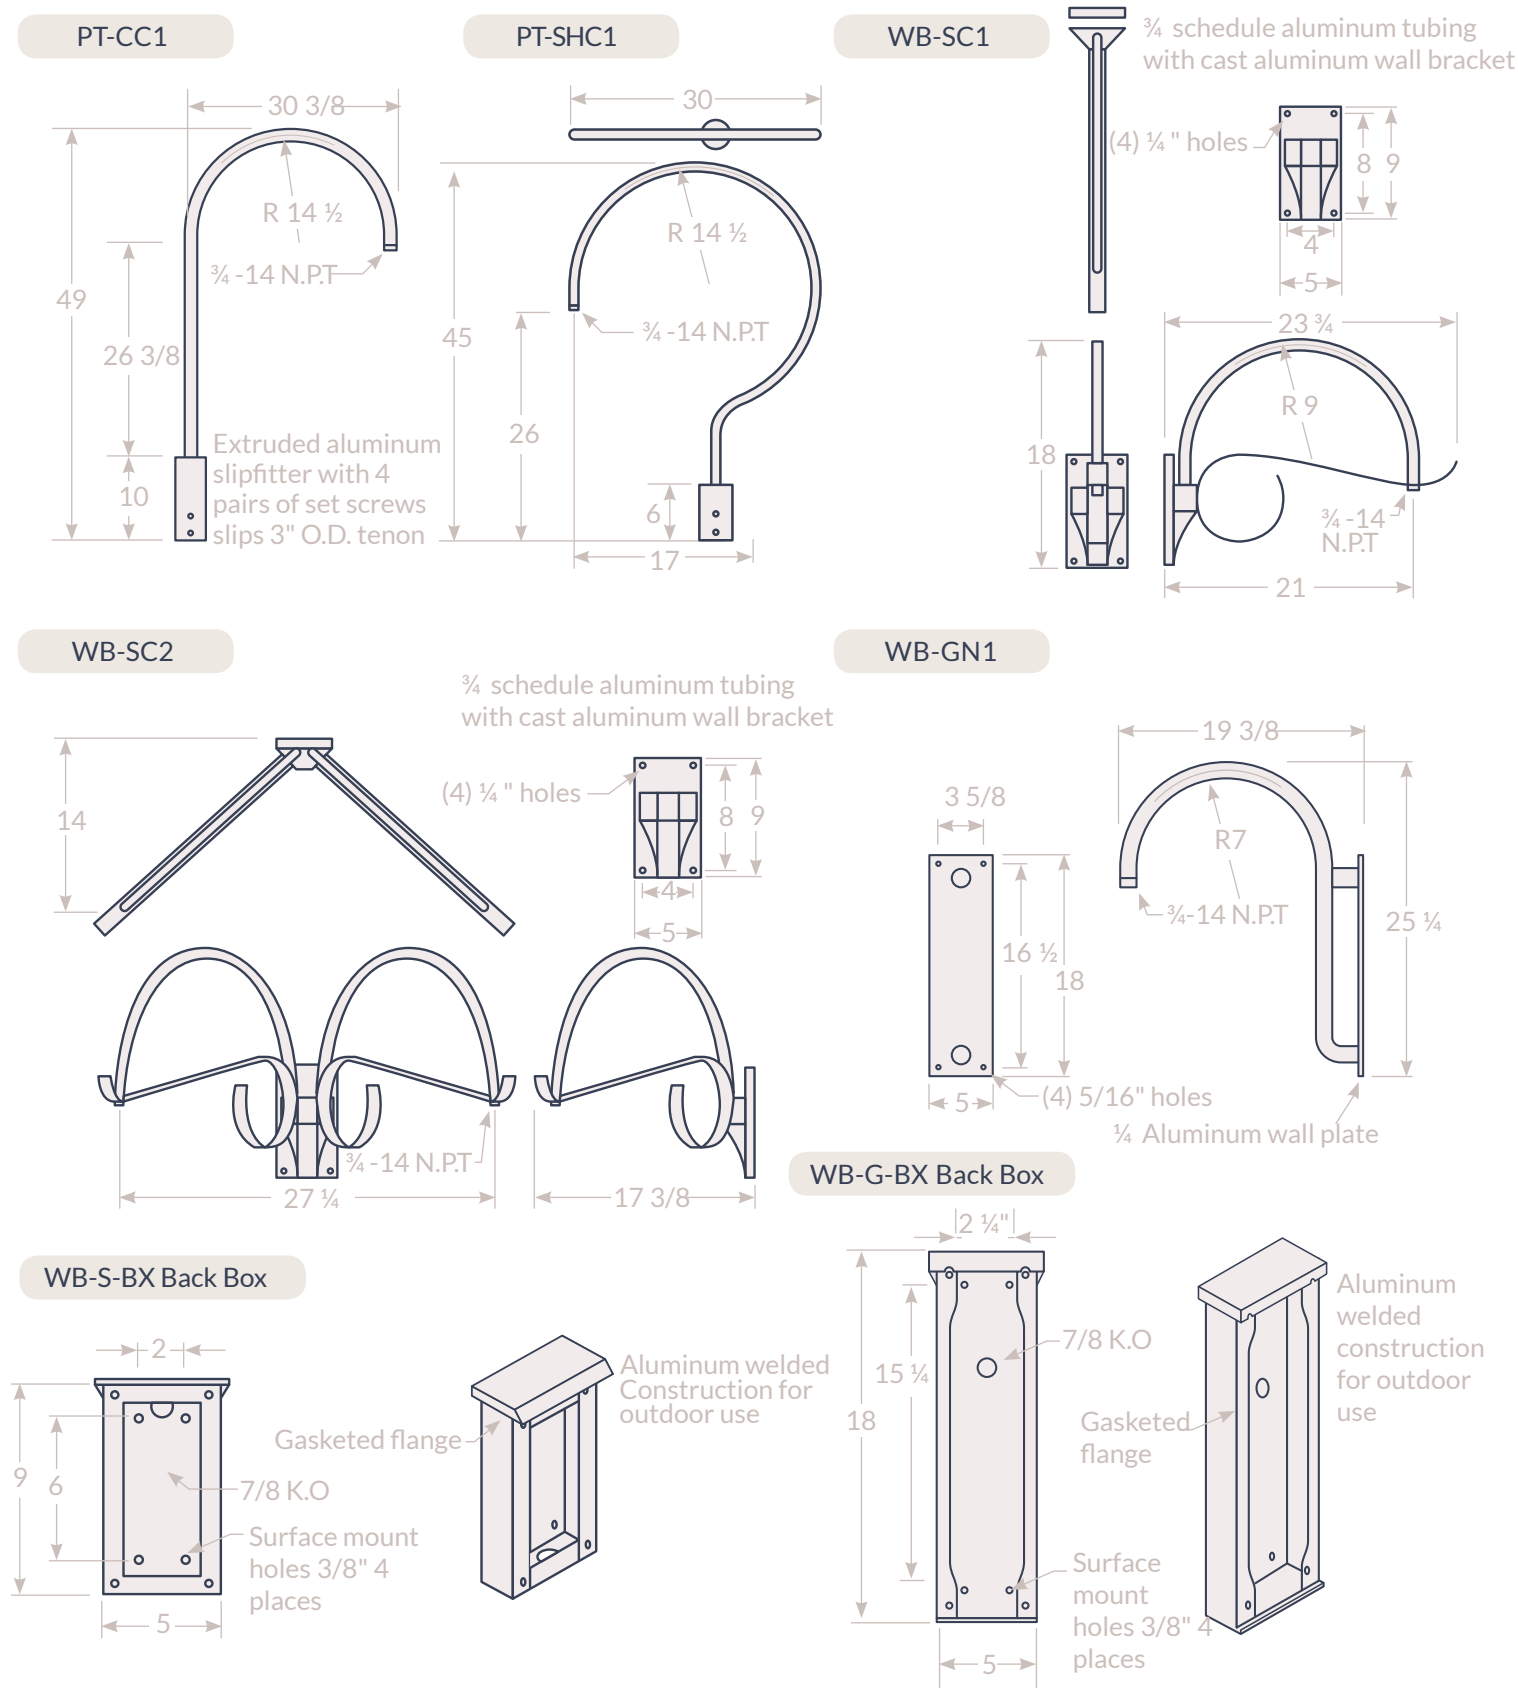

## Custom Mounting Options

Bock Lighting now offers custom mounting services that will create a solution to address the unusual needs of a project space or achieve the distinctive vision of a designer or owner. Let the Bock team dedicate their insight, experience, and manufacturing resources to overcoming project challenges and transforming dreams into reality.






## Photometric and Application Data

## DOME

516


200W A-25 InsideFrosted  
3640 Lumens - Spac.Crit.=1.

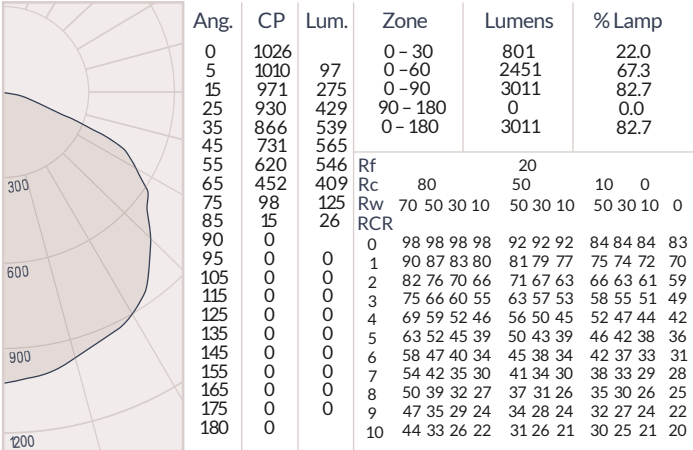

## SHALLOW DOME

414


150W A-21 Inside Frosted  
2850 Lumens - Spac.Crit.= 1.8

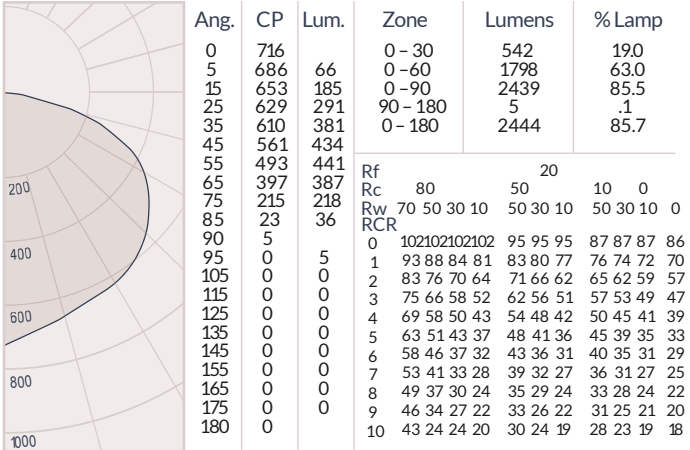

## SELF BALLASTED DOME With Prismatic Globe

520B<sub>w/42PR<</sub>


175W BD17 Clear Metal Halide  
1400 Lumens - Spac.Crit.=1.8

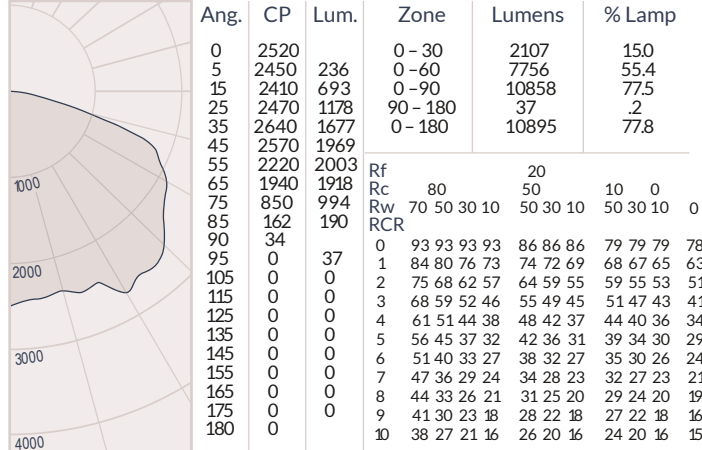

## SELF BALLASTED CONE With Prismatic Globe

120B<sub>w/42PR<</sub>


175W BD17 Clear Metal Halide  
1400 Lumens - Spac.Crit.= 1.6

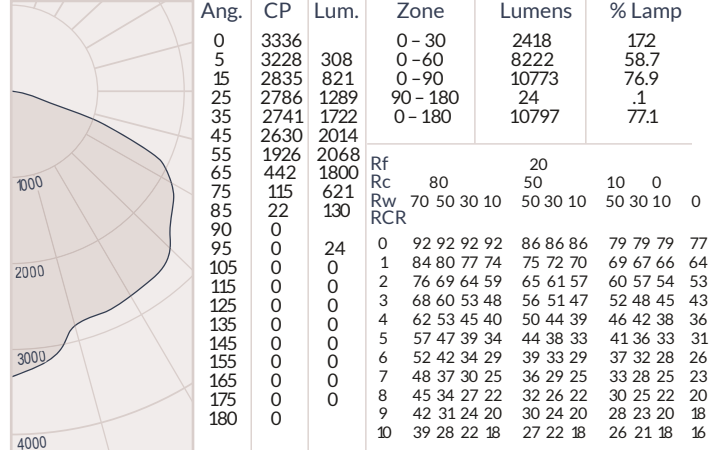

18" UPLIGHT

# 918-UL


500W PS-35 Inside Frosted  
10850 Lumens - Spac.Crit.=1

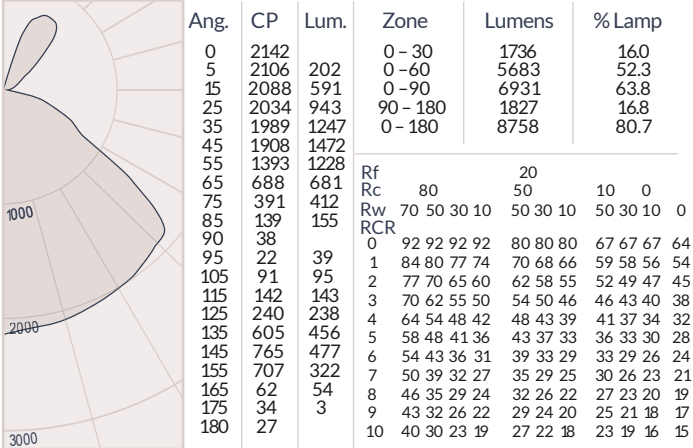


## 18" DOWNLIGHT

# 918-DL

500W PS-35 Inside Frosted  
10850 Lumens - Spac.Crit.=1

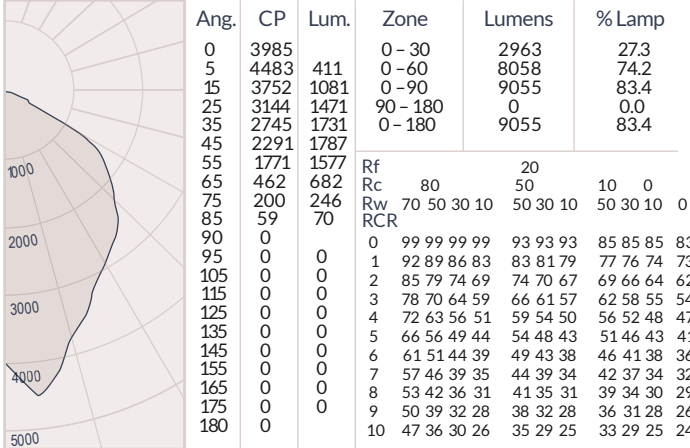

12" WHITE POWDER COATED REFLECTOR  
WITH PRISMATIC GLASS GLOBE  
100 WATT INSIDE FROSTED INCANDESCENT LAMP -  
1690 LUMENS

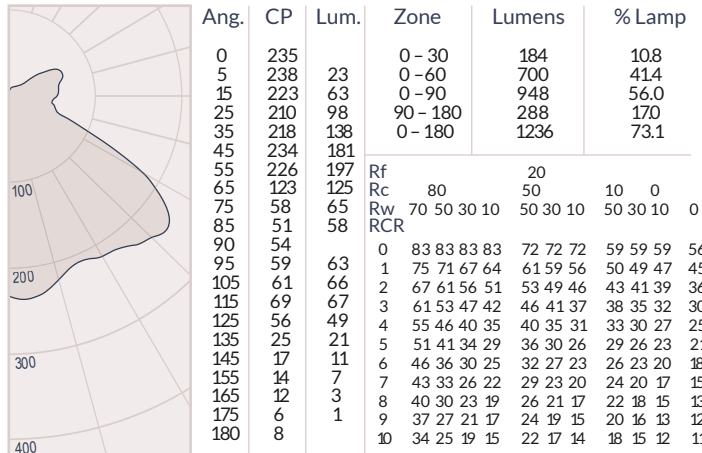


ISO FOOT CANDLE  
DIAGRAM 10'  
MOUNTING HEIGHT



## DEEP BOWL

912


200W A-21 Inside Frosted  
4010 Lumens - Spac.Crit.= 1.0

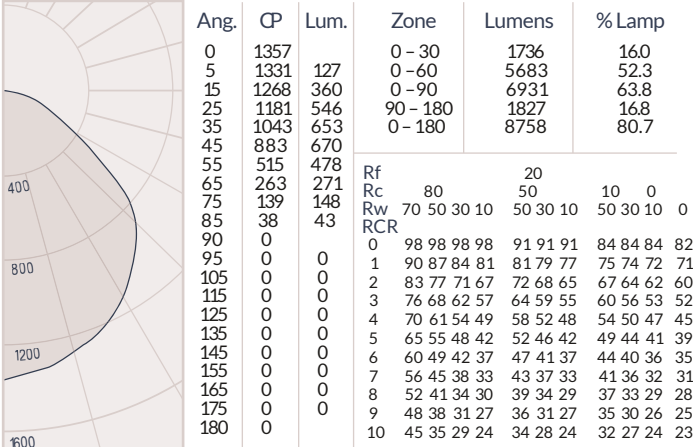

## RADIAL WAVE with Prismatic Globe

# RW-20<sub>w/42PR</sub>

200w A-21 Inside Frosted  
4010 Lumens - Spac.Crit.=1.0

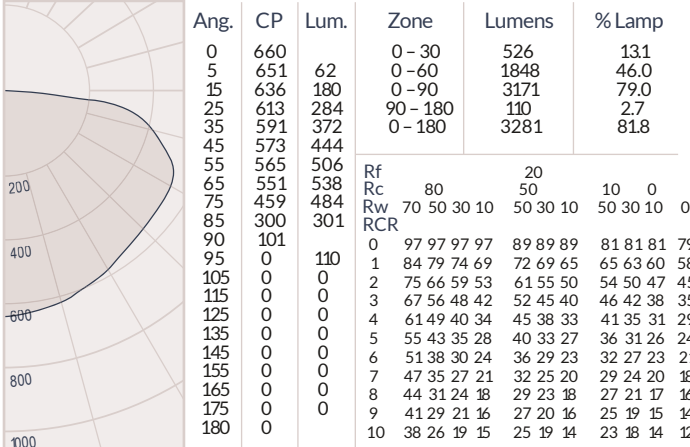




# Bock's Projects

## Customization? We can help!

At Bock, customized projects aren't exceptions, they're business as usual. We regularly work with designers to develop custom solutions and we recognize that each project has its own unique challenges and demands.

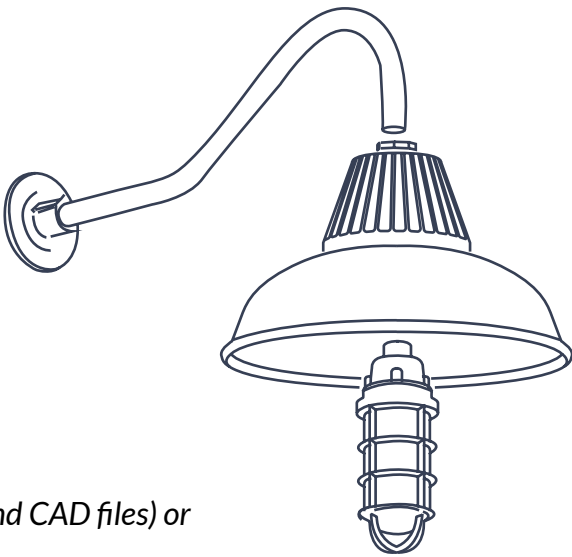

Some of the most common customization requests include:

- Unique mounting solutions
- Variations in color or finish
- Changes to trim styles
- Aesthetic tweaks to existing products
- Custom configurations from scratch

Please send your custom request to [sales@bocklighting.com](mailto:sales@bocklighting.com) (BIM, IES and CAD files) or give us a call 216-912-7050.\*\*\*\*













# BockLighting

**Your project is our passion!**

---

*RLM Reflectors    Decorative Commercial    Vaportights*  
*Indoor Commercial    Outdoor Commercial    Custom Fixtures*



 [BOCKLIGHTING.COM](http://BOCKLIGHTING.COM)

 [SALES@BOCKLIGHTING.COM](mailto:SALES@BOCKLIGHTING.COM)

 2476 EDISON BLVD, TWINSBURG,  
OHIO 44087

 216-912-7050