


Profile Z Bollard Series - Round Dome COB/Round Flat COB

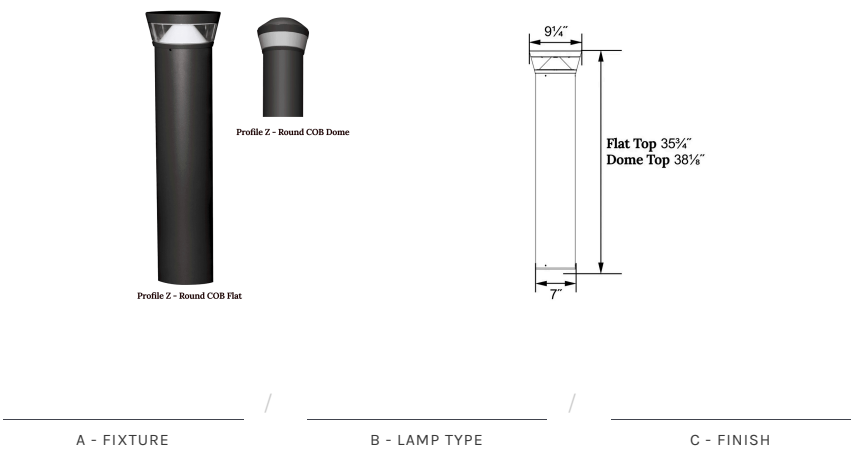

PZ - Round Dome COB /Round Flat COB

Application: Pathways, Parking Lots, Entrance Ways, Parks

Material: Extruded Aluminum Housing with Flush Mounting Base, Clear or Opal Polycarbonate Lens

Lamp Type: LED Type V, 120-277V or 347V, 0-10V Dimming down to 10%, 70W HID Equivalent

PZ- RDC (Round Dome COB) LED20W: 41K, 2,290LM Max

PZ- RFC (Round Flat COB) LED20W: 41K, 2,290LM Max

Dimensions: PZ- RDC (Round Dome COB): W: 9-1/4" in x D: 7" in x H: 38-1/8" in

PZ-RFC:(Round Flat COB) W: 9-1/4" in x D: 7" in x H: 35-3/4" in

Mounting: 3 x 8in Anchor Bolts with Bracket

Finish: Bronze or Black Powder Coat

Listing: ETL Listed for Wet Locations

A Fixture		Code	Name	Code	Name
Code	Name	PZ-RF-LED	3/4K, 5,000LM Max	PZ-SP-LED	3/4K, 5,000LM Max
PZ - RF	Round Flat	34W		34W	
PZ - SF	Square Flat	PZ-SF-LED1	3/4K, 5,000LM Max	PZ-RD-LED1	3/4K, 5,000LM Max
PZ - SP	Square Pyramid	6W		6W	
PZ - RD	Round Dome	PZ-SF-LED	3/4K, 5,000LM Max	PZ-RD-LED	3/4K, 5,000LM Max
		23W		23W	
		PZ-SF-LED	3/4K, 5,000LM Max	PZ-RD-LED	3/4K, 5,000LM Max
		34W		34W	
		PZ-SP-LED1	3/4K, 5,000LM Max		
		6W			
		PZ-SP-LED	3/4K, 5,000LM Max		
		23W			
B Lamp Type				C Finish	
Code	Name			Code	Name
PZ-RF-LED1	3/4K, 5,000LM Max			BZ	Bronze
6W				BK	Black
PZ-RF-LED	3/4K, 5,000LM Max				
23W					