

Standard Dome - Gooseneck Mounted



Concept: Classic Standard Warehouse Shade. First made at Spero Electric in the early 1900s, This fixture stands the test of time for lighting needs that span across industry. Features a corrosion resistant aluminum metal spinning with rolled in bead for extra water resistance.

Lamping: Incandescent and LED lamping options available, 120-277V, Triac, ELV, Lutron and 0-10V available.

Finish: Powder Coat with Polyester with high UV resistance to withstand outdoor use. Marine grade available for coastal locations.

Certification: cULus for Wet Locations.

BAA/BABA: Please add either BAA or BABA to end of part number if job requires.

A Series

Standard Dome:

Code	Name	Diameter	Height	Wattage	Wattage
508	8" Standard Dome	8	7.25	60	60
510	10" Standard Dome	10	7.25	60	60
512	12" Standard Dome	12	8	100	100
514	14" Standard Dome	14	8	150	150
516	16" Standard Dome	16	9	200	200
518	18" Standard Dome	18	11	300	300
520	20" Standard Dome	20	12	300	300

Code	Name	Diameter	Height	Wattage	Wattage
41LCO	41 Lexan Opal for RLM				

* Require's Finish, See B, -eGXX = Exterior Finish, -iGXX = Interior Finish, Example: 512-eG0-iG1

B Finish

Powder Coat Finishes:

Code	Name
GXX	To be determined.
G0	Black
G1	White
G2	Red
G4	Blue
G5	Green
G6	Brown
G8	Dark Bronze
G9	Silver
G10	Dark Green
G12	Brushed Aluminum
G16	Silver Wrinkle
G27	Matte Black
G28	Sun Gold
G41	Sand
G42	Pastel Blue
G43	Pale Green
G44	Oxblood
G45	Emerald

For more finishes, see <https://www.bocklighting.com/colors>

C Lamp Type

Sockets:

Code	Name
MED5	E26 Medium Base Socket

Adjustable LED Lumens & Kelvin Module - Indoor/Outdoor:

Code	Name
LAC02	LAC02 1500-2400LM, 30-50K, 23W, 80CRI
LAC03	LAC03 1650-2750LM, 27-50K, 23W, 90CRI
LAH01	LAH01 3000-5000LM, 27-50K, 43W, 80CRI
LAH02	LAH02 3300-5250LM, 27-50K, 43W, 90CRI

*LAH Style only 16"+ Compatible

D Jelly Jar

41 Glass Jelly Jar in RLMs:

Standard Dome - Gooseneck Mounted

Code	Name
41	41 - Clear for RLM
41-Pontil	41 Pontil Glass Lens for RLM
41F	41 Frost for RLM
41PR	41 Prismatic for RLM
41S	41S Short Clear for RLM
41SF	41 Short Frosted for RLM

42 Glass Jelly Jar in RLMs:

Code	Name
42	42 Clear for RLM
42F	42 Frosted for RLM

E Lens Guard

Globe Guards:



Code	Name
31DCG	31DCG
31WG	31 Wire Guard for Vaportight
32DCG	32DCG

Code	Name
32WG	32 Wire Guard for 42 Glass

* Require's Finish, See B, -GXX, Example: 31DCG-G0

F Wire Guard

Wire Guards:



Code	Name
4GR14	14in Wireguard
4GR16	16in Wireguard
4GR18	18in Wireguard
4GR24	24in Wireguard
108AR	8in Wireguard
110AR	10in Wireguard
112AR	12in Wireguard
113AR	13in Wireguard
114AR	14in Wireguard
115AR	15in Wireguard
116AR	16in Wireguard
118AR	18in Wireguard
120AR	20in Wireguard

* Require's Finish, See B, -GXX, Example: 112AR-G2

G Gooseneck


Gooseneck Top - Top Mounted:



Code	Name
GN23A	23" Style A Gooseneck
GN10K	10" Style K Gooseneck
GN15H	15" Style H Gooseneck
GN17A	17" Style A Gooseneck
GN22H	22" Style H Gooseneck
GN24D	24" Style D Gooseneck
GN25J	25" Style J Gooseneck
GN30C	30" Style C Gooseneck
GN32G	32" Style G Gooseneck
GN37U	37" Style U Gooseneck
GN40E	40" Style E Gooseneck
GN48B	48" Style B Gooseneck
GN56F	56" Style F Gooseneck

* Require's Finish, See B, -GXX, Example: GN23A-G1

Fixture Size Option

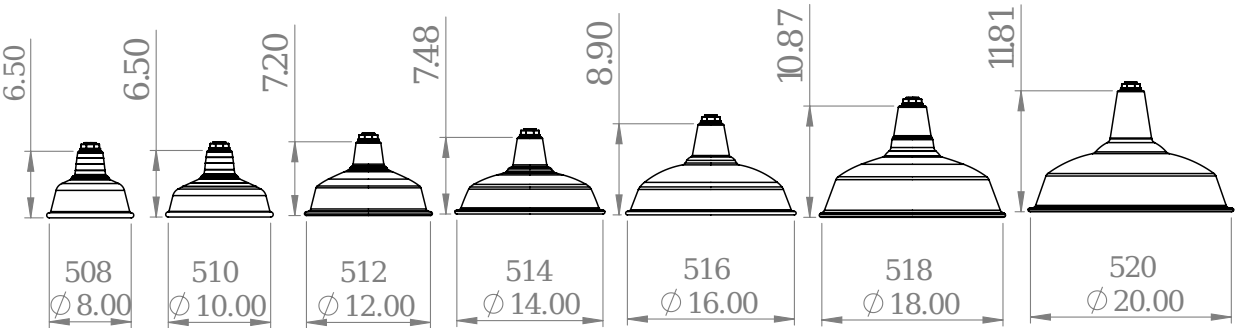

Standard Color Option

Standard Dome - Gooseneck Mounted



Goosenecks Option

